

EXTERIOR

TECHNICAL

content

02	Stork family
06	Martin family
08	Colibri family
09	Blackbird Bio-Plastic family
10	Blackbird family
12	Luschnia family
14	Lapwing family
16	Blackbird family
20	Woodpecker
21	Heron
22	Lilly, Crocus
23	Orris Basic, Bell
24	Floodlighting
26	Mustang
27	Owl
28	Eagle family
30	Nightjar family

Stork family



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body: Die-cast aluminium
Dimming: DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming
CRI: >70 / >80 / >90 ⁽¹⁾
CCT: 2700 / 3000 / 4000 / TW 2700 - 6500 K ⁽¹⁾
Lifetime: Up to 100 000 h (L98B10) at Ta = 25 °C
Warranty: 5 years
Temperature: -40 up to +50 °C ⁽²⁾

Installation: Tool-less
Socket: NEMA Top / Zhaga Top and Bottom
Intelligent control: Stand-alone / Group / CMS
Sensor: Motion / Motion + Daylight / Daylight
Surge protection: 4 / 6 / 10 kV
Nature friendly: PC Amber / Red / 1800 K
Corrosion protection: Up to C5
Net weight: Up to 13.8 kg

⁽¹⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

Note! Only fixtures with CCT of 3000 K or lower are DarkSky approved!

⁽²⁾ Operating temperature differs depending on chosen output wattage

STORK RANGE



with fins

smooth



4 console versions available



ø 60 mm



ø 76 mm



ø 60 mm
± 90°



ø 76 mm
± 90°

STORK

Voltage: 198 - 264 / 110 - 277 V, 50 - 60 Hz
Power: 5 - 280 W
Lumen output: Up to 41 000 lm



STORK SMOOTH

Voltage: 198 - 264 / 110 - 277 V, 50 - 60 Hz
Power: 5 - 200 W
Lumen output: Up to 30 500 lm



⁽³⁾ Coming soon

STORK LITTLE BROTHER RANGE



with fins



rough



smooth



4 console versions available



ø 60 mm

ø 76 mm

ø 60 mm
± 90°

ø 76 mm
± 90°

STORK LITTLE BROTHER

Voltage: 198 - 264 / 110 - 277 / 90 - 305 V, 50 - 60 Hz
Power: 5 - 200 W
Lumen output: Up to 29 512 lm




STORK LITTLE BROTHER ROUGH

Voltage: 198 - 264 / 110 - 277 / 90 - 305 V, 50 - 60 Hz
Power: 161 - 230 W
Lumen output: Up to 33 280 lm



STORK LITTLE BROTHER SMOOTH

Voltage: 198 - 264 / 110 - 277 / 90 - 305 V, 50 - 60 Hz
Power: 5 - 190 W
Lumen output: Up to 28 865 lm



Stork Little Brother,
Gothenburg,
Sweden

Stork family



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body: Die-cast aluminium
Dimming: DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming
CRI: >70 / >80 / >90 ¹⁾
CCT: 2700 / 3000 / 4000 K ¹⁾
Lifetime: Up to 100 000 h (L98B10) at Ta = 25 °C
Warranty: 5 years
Temperature: -40 up to +50 °C ²⁾

Installation: Tool-less
Socket: NEMA Top / Zhaga Top and Bottom
Intelligent control: Stand-alone / Group / CMS
Sensor: Motion / Motion + Daylight / Daylight
Surge protection: 4 / 6 / 10 kV
Nature friendly: PC Amber / Red / 1800 K
Corrosion protection: Up to C5
Neto weight: Up to 5.8 kg

¹⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

Note! Only fixtures with CCT of 3000 K or lower are DarkSky approved!

²⁾ Operating temperature differs depending on chosen output wattage


STORK LITTLE SISTER RANGE



with fins



smooth




4 console versions available




STORK LITTLE SISTER

Voltage: 198 - 264 / 110 - 277 V, 50 - 60 Hz
Power: 5 - 80 W
Lumen output: Up to 10 500 lm



STORK LITTLE SISTER SMOOTH


Voltage: 198 - 264 / 110 - 277 V, 50 - 60 Hz
Power: 5 - 50 W
Lumen output: Up to 7 100 lm



STORK LITTLE SISTER EXTENDED RANGE



smooth



4 console versions available




STORK LITTLE SISTER EXTENDED SMOOTH

Voltage: 198 - 264 V, 50 - 60 Hz

Power: 5 - 75 W

Lumen output: Up to 11 859 lm



Stork Little Sister,
Budapest Ferenc Liszt
International Airport, Hungary

Martin family



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body: Die-cast aluminium
Dimming: DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming
Voltage: 198 - 264 / 110 - 277 V, 50 - 60 Hz
CRI: >70 / >80 / >90
Lifetime: Up to 100 000 h (L98B10) at Ta = 25 °C
Warranty: 5 years
Temperature: -40 up to +50 °C ⁴

Installation: Pre-wired cable 30 cm
Socket: NEMA Top / Zhaga Top and Bottom
Intelligent control: Stand-alone / Group / CMS
Sensor: Motion / Motion + Daylight / Daylight
Surge protection: 4 / 6 / 10 kV
Nature friendly: PC Amber / Red / 1800 K
Corrosion protection: Up to C5
Neto weight: Up to 6.5 kg


¹⁾ Depending on the configuration. Please contact VIZULO export representatives for additional information

²⁾ Coming soon

³⁾ Available only for Tool-less and Tool-less Smooth versions


⁴⁾ Operating temperature differs depending on chosen output wattage

MINI MARTIN RANGE

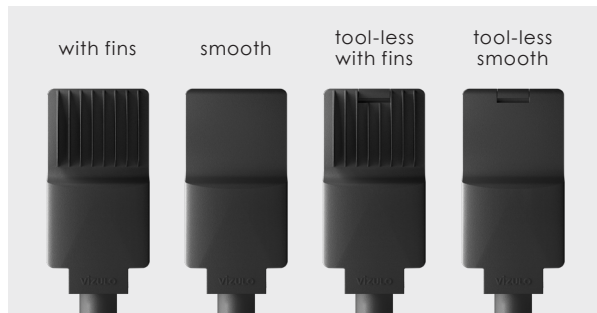


MINI MARTIN / MINI MARTIN TOOL-LESS

Power: 5 - 145 W
Lumen output: Up to 18 540 lm
CCT: 2700 / 3000 / 4000 / TW 2700-6500 K ⁵



MINI MARTIN SMOOTH / MINI MARTIN TOOL-LESS SMOOTH

Power: 5 - 130 W
Lumen output: Up to 17 480 lm
CCT: 2700 / 3000 / 4000 / TW 2700-6500 K ⁵




⁵⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

MICRO MARTIN RANGE



screw
version

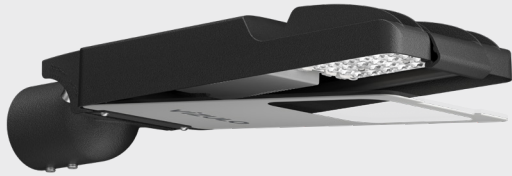

tool-less
version

with fins

smooth

tool-less
with fins

tool-less
smooth




3 console versions available



MICRO MARTIN / MICRO MARTIN TOOL-LESS

Power: 5 - 115 W
Lumen output: Up to 14 371 lm
CCT: 2700 / 3000 / 4000 K ⁽⁵⁾



MICRO MARTIN SMOOTH / MICRO MARTIN TOOL-LESS SMOOTH

Power: 5 - 95 W
Lumen output: Up to 12 183 lm
CCT: 2700 / 3000 / 4000 K ⁽⁵⁾



⁵⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT



Mini Martin,
Watkins St, Merewether,
Australia

Colibri family



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body: Die-cast aluminium
Dimming: DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming
Voltage: 220 - 240 / 110 - 277 V, 50 - 60 Hz
CRI: >70 / >80 / >90 ¹²
CCT: 2700 / 3000 / 4000 K ¹²
Lifetime: Up to 100 000 h (L98B10) at Ta = 25 °C
Warranty: 5 years
Temperature: -40 up to +50 °C ¹³

Installation: Pre-wired cable 30 cm
Spigot: 42 mm / 60 mm / 76 mm
Socket: NEMA Top / Zhaga Top and Bottom
Intelligent control: Stand-alone / Group / CMS
Sensor: Motion / Motion + Daylight / Daylight
Surge protection: 4 / 6 / 10 kV
Corrosion protection: Up to C5
Neto weight: Up to 4.2 kg

¹¹ Coming soon

¹² 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

Note! Only fixtures with CCT of 3000 K or lower are DarkSky approved!

¹³ Operating temperature differs depending on chosen output wattage

¹⁴ Coming soon


¹⁵ IK09 can be reached with clear glass



Colibri,
Dalfsen,
Netherlands



COLIBRI MIDI

Power: 5 - 87 W
Lumen output: Up to 13 100 lm



COLIBRI

Power: 5 - 45 W
Lumen output: Up to 6 028 lm



Possible regulation angles

Blackbird Bio-Plastic family



RAL7035 RAL9006 DB703 RAL9005

Other console colors on request

Body: Bioplastic & Die-cast aluminium ⁽²⁾
Power: 5 - 100 W
Dimming: DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming
Voltage: 198 - 264 / 110 - 277 V, 50 - 60 Hz
CRI: >70 / >80 / >90 ⁽³⁾
CCT: 2700 / 3000 / 4000 / TW 2700 - 6500 K ⁽³⁾
Temperature: -40 up to +50 °C ⁽⁴⁾


Lifetime: Up to 100 000 h (L98B10) at Ta = 25 °C
Warranty: 5 years
Installation: Tool-less / Pre-wired cable 30 cm
Socket: NEMA Top / Zhaga Top and Bottom
Intelligent control: Stand-alone / Group / CMS
Sensor: Motion / Motion + Daylight / Daylight
Surge protection: 4 / 6 / 10 kV
Corrosion protection: Up to C5

⁽¹⁾ Coming soon

⁽²⁾ Spherical body part made of bioplastic, console made of die-cast aluminium


⁽³⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

⁽⁴⁾ Operating temperature differs depending on chosen output wattage




BLACKBIRD PLASTIC SIDE ENTRY

Lumen output: Up to 15 500 lm
Spigot: 32 - 40 mm / 40 - 60 mm / 76 mm




BLACKBIRD PLASTIC POST TOP

Lumen output: Up to 15 500 lm
Spigot: 32 - 40 mm / 40 - 60 mm / 76 mm




BLACKBIRD PLASTIC HANGING

Lumen output: Up to 15 500 lm
Mounting: On wire ø 5 - 12 mm




BLACKBIRD PLASTIC TOP ENTRY

Lumen output: Up to 15 500 lm
Mounting: On console with M32 | G1/2 | G3/4 thread




BLACKBIRD PLASTIC MUSHROOM

Lumen output: Up to 14 700 lm
Spigot: 32 - 40 mm / 40 - 60 mm / 76 mm



BLACKBIRD PLASTIC SCEPTER

Lumen output: Up to 15 500 lm
Spigot: On scepter M20



BLACKBIRD PLASTIC FLOOD

Lumen output: Up to 15 500 lm
Spigot: On bracket / Wall / Ceiling

Blackbird family



Other colors on request


Body:	Die-cast aluminium	Warranty:	5 years
Power:	5 - 100 W	Installation:	Pre-wired cable 30 cm
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Socket:	NEMA Top / Zhaga Top and Bottom
Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz	Intelligent control:	Stand-alone / Group / CMS
CRI:	>70 / >80 / >90 ¹⁾	Sensor:	Motion / Motion + Daylight / Daylight
CCT:	2700 / 3000 / 4000 / TW 2700 - 6500 K ³⁾	Surge protection:	4 / 6 / 10 kV
Temperature:	-40 up to +50 °C ⁴⁾	Corrosion protection:	Up to C5
Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C	Neto weight:	Up to 8.5 kg

¹⁾ Except Blackbird Mushroom screw version, which has IP65
²⁾ Coming soon
³⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT
 Note! Only fixtures with CCT of 3000 K or lower are DarkSky approved!
⁴⁾ Operating temperature differs depending on chosen output wattage




Blackbird Flood,
Deventer Hospital,
Netherlands






BLACKBIRD SIDE ENTRY / BLACKBIRD SIDE ENTRY TOOL-LESS

Lumen output: Up to 15 500 lm
Spigot: 32 - 40 mm / 40 - 60 mm / 76 mm




BLACKBIRD POST TOP / BLACKBIRD POST TOP TOOL-LESS

Lumen output: Up to 15 500 lm
Spigot: 32 - 40 mm / 40 - 60 mm / 76 mm




BLACKBIRD HANGING / BLACKBIRD HANGING TOOL-LESS

Lumen output: Up to 15 500 lm
Mounting: On wire $\varnothing$ 5 - 12 mm




BLACKBIRD TOP ENTRY / BLACKBIRD TOP ENTRY TOOL-LESS

Lumen output: Up to 15 500 lm
Mounting: On console with M32 | G1/2 | G3/4 thread




BLACKBIRD MUSHROOM / BLACKBIRD MUSHROOM TOOL-LESS

Lumen output: Up to 14 700 lm
Spigot: 32 - 40 mm / 40 - 60 mm / 76 mm



BLACKBIRD SCEPTER / BLACKBIRD SCEPTER TOOL-LESS

Lumen output: Up to 15 500 lm
Spigot: On scepter M20



BLACKBIRD FLOOD / BLACKBIRD FLOOD TOOL-LESS

Lumen output: Up to 15 500 lm
Spigot: On bracket / Wall / Ceiling

Luscinia family



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body:	Die-cast aluminium	Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C
Power:	5 - 75 W	Warranty:	5 years
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Installation:	Pre-wired cable 30 cm
Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz	Socket:	NEMA Top / Zhaga Top and Bottom
CRI:	>70 / >80 / >90 ¹⁾	Intelligent control:	Stand-alone / Group / CMS
CCT:	2700 / 3000 / 4000 K ²⁾	Sensor:	Motion / Motion + Daylight / Daylight
Temperature:	-40 up to +50 °C ³⁾	Surge protection:	4 / 6 / 10 kV
		Corrosion protection:	Up to C5

¹⁾ Coming soon

²⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

³⁾ Operating temperature differs depending on chosen output wattage



Luscinia Post Top





Luscinia Post Top
with LED cover plate




Luscinia Post Top
with opal glass

LUSCINIA POST TOP

Lumen output:	Up to 11 400 lm
Spigot:	32 - 40 mm / 40 - 60 mm / 76 mm
Neto weight:	Up to 6.5 kg




Dimensions with
Luscinia Cap accessory




LUSCINIA TOP ENTRY

Lumen output: Up to 11 150 lm
Mounting: On console with 1/2" thread
Neto weight: Up to 6 kg




LUSCINIA SIDE ENTRY

Lumen output: Up to 11 150 lm
Spigot: 32 - 40 mm / 40 - 60 mm / 76 mm
Neto weight: Up to 6.5 kg



LUSCINIA HANGING

Lumen output: Up to 11 150 lm
Mounting: On wire ø 5 - 12 mm
Neto weight: Up to 4.8 kg



LUSCINIA HANGING WITH THROUGH WIRING

Lumen output: Up to 11 150 lm
Mounting: On wire ø 5 - 12 mm
Neto weight: Up to 5.6 kg



Luscinia Post Top,
 Marks gymnasieskola,
 Kinna, Sweden

Lapwing family



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body: Die-cast aluminium
Power: 5 - 150 W
Dimming: DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming
Voltage: 198 - 264 / 110 - 277 V, 50 - 60 Hz
Lumen output: Up to 24 057 lm
CRI: >70 / >80 / >90²⁾
CCT: 2700 / 3000 / 4000 / TW 2700 - 6500 K²⁾
Temperature: -40 up to +55 °C³⁾

Lifetime: Up to 100 000 h (L98B10) at Ta = 25 °C
Warranty: 5 years
Installation: Tool-less / Pre-wired cable 30 cm
Socket: NEMA Top / Zhaga Top and Bottom
Intelligent control: Stand-alone / Group / CMS
Sensor: Motion / Motion + Daylight / Daylight
Surge protection: 4 / 6 / 10 kV
Nature friendly: PC Amber / Red / 1800 K
Corrosion protection: Up to C5

¹⁾ Coming soon


²⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

³⁾ Operating temperature differs depending on chosen output wattage




LAPWING Y-TYPE | TOOL-LESS


Spigot: 32 - 40 mm / 40 - 60 mm / 76 mm
Neto weight: Up to 12.7 kg



LAPWING J-TYPE | TOOL-LESS


Spigot: 32 - 40 mm / 40 - 60 mm / 76 mm
Neto weight: Up to 11.8 kg






LAPWING TOP ENTRY | TOOL-LESS

Mounting: On console with G1/2 or G3/4 thread
Neto weight: Up to 9.3 kg




LAPWING SIDE ENTRY | TOOL-LESS

Spigot: 32 - 40 mm / 40 - 60 mm / 76 mm
Neto weight: Up to 10 kg



LAPWING HANGING | TOOL-LESS

Mounting: On wire ø 5 - 12 mm
Neto weight: Up to 10 kg



LAPWING MUSHROOM | TOOL-LESS

Spigot: 32 - 40 mm / 40 - 60 mm / 76 mm
Neto weight: Up to 8.2 kg



Blackbird family



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body: Die-cast aluminium
Voltage: 198 - 264 V, 50 - 60 Hz
CRI: >70 / >80 / >90 ¹⁾
CCT: 2700 / 3000 / 4000 K ²⁾
Temperature: -40 to +50 °C
Lifetime: Up to 100 000 h (L98B10) at Ta = 25 °C
Warranty: 5 years

Installation: Pre-wired cable 30 cm
Intelligent control: Stand-alone / Group / CMS
Sensor: Motion / Motion + Daylight / Daylight
Surge protection: 4 / 6 / 10 kV
Nature friendly: PC Amber / Red / 1800 K
Corrosion protection: Up to C5

¹⁾ Coming soon

²⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

BLACKBIRD MINI | ø 200 mm

Dimming: DALI / 1-10 V / Midnight dimming /
Step dimming / Mains dimming
Power: 5 - 30 W
Lumen output: Up to 3 740 lm
Socket: NEMA Top / Zhaga Top and Bottom

BLACKBIRD MICRO | ø 120 mm

Dimming: DALI / Non dimmable
Power: 5 - 12 W
Lumen output: Up to 1 630 lm

Hanging



BLACKBIRD MINI HANGING
/ WITH ZHAGA /

Spots

BLACKBIRD MINI
SPOT BRACKET MOUNT
/ WITH HALO /



BLACKBIRD MICRO
SPOT BRACKET MOUNT
/ WITH SMALL SNOOT /




BLACKBIRD MINI
SPOT FLANGE MOUNT
/ WITH SMALL SNOOT /



BLACKBIRD MICRO
SPOT FLANGE MOUNT
/ WITH HALO /



BLACKBIRD MINI
SPOT BRACKET MOUNT
/ WITH ASYMMETRICAL SNOOT /



BLACKBIRD MICRO
SPOT BRACKET MOUNT
/ WITH ASYMMETRICAL SNOOT /



Blackbird family



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body: Die-cast aluminium
Voltage: 198 - 264 V, 50 - 60 Hz
CRI: >70 / >80 / >90 ¹⁾
CCT: 2700 / 3000 / 4000 K ²⁾
Temperature: -40 to +50 °C
Lifetime: Up to 100 000 h (L98B10) at Ta = 25 °C
Warranty: 5 years

Installation: Pre-wired cable 30 cm
Intelligent control: Stand-alone / Group / CMS
Sensor: Motion / Motion + Daylight / Daylight
Surge protection: 4 / 6 / 10 kV
Nature friendly: PC Amber / Red / 1800 K
Corrosion protection: Up to C5

¹⁾ Coming soon

²⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

BLACKBIRD MINI | ø 200 mm

Dimming: DALI / 1-10 V / Midnight dimming /
Step dimming / Mains dimming
Power: 5 - 30 W
Lumen output: Up to 3 740 lm
Socket: NEMA Top / Zhaga Top and Bottom

BLACKBIRD MICRO | ø 120 mm

Dimming: DALI / Non dimmable
Power: 5 - 12 W
Lumen output: Up to 1 630 lm

Facade



BLACKBIRD MINI / MICRO HALF SPHERE FACADE



BLACKBIRD MINI / MICRO FACADE CONSOLE
/ WITH HALO /

Bollards



BLACKBIRD MINI / MICRO
BOLLARD MUSHROOM

BLACKBIRD MINI / MICRO
BOLLARD HOOD



/ 1150 mm /



/ 700 mm /



/ 1200 mm /



/ 700 mm /

Woodpecker





RAL9005

Body:	Extruded aluminium
Power:	15 - 28 W Small 20 - 52 W Large
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming
Voltage:	220 - 240 V, 50 - 60 Hz
Lumen output:	Up to 7 500 lm
CRI:	>70 / >80 / >90 ¹⁾
CCT:	2700 / 3000 / 4000 ¹⁾
Temperature:	-40 to +50 °C
Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C

Warranty:	5 years
Installation:	On flange
Socket:	NEMA Top / Zhaga Top and Bottom
Intelligent control:	Stand-alone / Group / CMS
Sensor:	Motion / Motion + Daylight / Daylight
Surge protection:	4 / 6 / 10 kV
Nature friendly:	PC Amber / Red / 1800 K
Corrosion protection:	Up to CX
Neto weight:	Up to 0.9 kg Small Up to 1.6 kg Large

¹⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

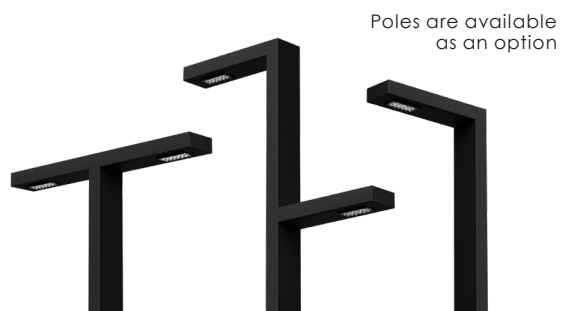

Robin & Rook



RAL9005

Body:	Die-cast aluminium
Voltage:	220 - 240 V, 50 - 60 Hz
CRI:	>70 / >80 / >90 ¹⁾
CCT:	2700 / 3000 / 4000 ¹⁾
Temperature:	-40 to +40 °C
Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C

Warranty:	5 years
Installation:	On wall
Surge protection:	4 / 6 / 10 kV
Nature friendly:	PC Amber / Red / 1800 K
Corrosion protection:	Up to C5
Neto weight:	Up to 3.3 kg

¹⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

ROBIN


IP66 IK10

Power:	8 - 26 W
Dimming:	DALI / Midnight dimming / Non dimmable
Lumen output:	Up to 3 350 lm

ROOK

IP65 IK08

Power:	15 - 28 W
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming
Lumen output:	Up to 3 890 lm

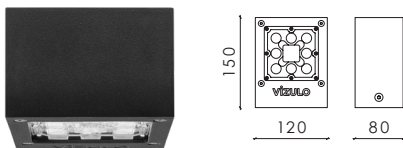

Heron



RAL9006 DB703 RAL9005 GALVANIZED

Other colors on request

Body: Extruded Aluminium / Steel
Power: 8 - 26 W
Dimming: DALI / Midnight dimming
Voltage: 220 - 240 V, 50 - 60 Hz
Lumen output: Up to 3 350 lm
CRI: >70 / >80 / >90 ¹⁾
CCT: 2700 / 3000 / 4000 K ¹⁾
Temperature: -40 to +40 °C

Lifetime: Up to 100 000 h (L98B10) at Ta = 25 °C
Warranty: 5 years
Installation: IP connector
Mounting: On flange
Surge protection: 1 / 2 / 4 / 10 kV
Nature friendly: PC Amber / Red / 1800 K
Corrosion protection: Up to C5
Neto weight: Up to 15 kg

¹⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT



Heron,
Wagga Wagga,
Australia

Lilly & Crocus



RAL9005

Body: Die-cast aluminium
Power: 5 - 100 W
Dimming: DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming
Voltage: 220 - 240 V, 50 - 60 Hz
CRI: >70 / >80 / >90 ⁽¹⁾
CCT: 2700 / 3000 / 4000 / TW 2700 - 6500 K ⁽¹⁾
Temperature: -40 to +40 °C

Lifetime: Up to 100 000 h (L98B10) at Ta = 25 °C
Warranty: 5 years
Intelligent control: Stand-alone / Group / CMS
Sensor: Daylight
Surge protection: 4 / 6 / 10 kV
Nature friendly: PC Amber / Red / 1800 K
Corrosion protection: Up to CX

⁽¹⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

LILLY

IP66

Lumen output: Up to 12 475 lm
Socket: NEMA Top / Zhaga Top
Spigot: 60 - 75 mm / 76 - 80 mm
Neto weight: Up to 10.1 kg



CROCUS

IP54

Lumen output: Up to 12 235 lm
Socket: NEMA Top / Zhaga Top and Bottom
Spigot: 40 - 76 mm
Neto weight: Up to 8.9 kg



↙
 Lilly,
 Akureyri, Iceland



↙
 Crocus,
 Akureyri, Iceland

Orris Basic & Bell



RoHS



RAL9005

Body: Die-cast aluminium
Dimming: DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming
Voltage: 220 - 240 V, 50 - 60 Hz
CRI: >70 / >80 / >90 ⁽¹⁾
CCT: 2700 / 3000 / 4000 / TW 2700 - 6500 K ⁽¹⁾
Lifetime: Up to 100 000 h (L98B10) at Ta = 25 °C

Warranty: 5 years
Intelligent control: Stand-alone / Group / CMS
Sensor: Daylight
Surge protection: 4 / 6 / 10 kV
Nature friendly: PC Amber / Red / 1800 K
Corrosion protection: Up to CX

¹⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

ORRIS BASIC

IP65


IK08

Power: 5 - 75 W
Lumen output: Up to 8 920 lm
Temperature: -40 up to +50 ⁽²⁾
Socket: NEMA Top / Zhaga Top
Spigot: 40 - 60 mm
Neto weight: Up to 5.6 kg

²⁾ Operating temperature differs depending on chosen output wattage

³⁾ ENEC update for IP66 coming soon

⁴⁾ IK08 refers to version with flat glass

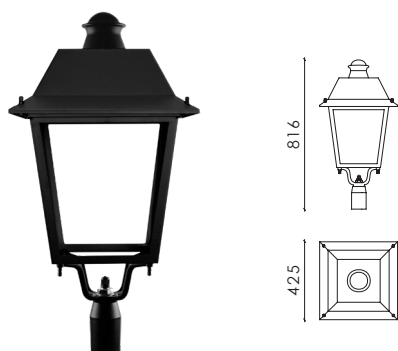

BELL

IP54 / IP66 ⁽³⁾


IK08 / IK10 ⁽⁴⁾

Power: 5 - 82 W
Lumen output: Up to 12 125 lm
Temperature: -40 to +40 °C
Socket: Zhaga Top
Mounting: On console with ø 28 mm bracket / On console with G1/2" thread
Neto weight: Up to 7.6 kg

Standard version



Flat glass version

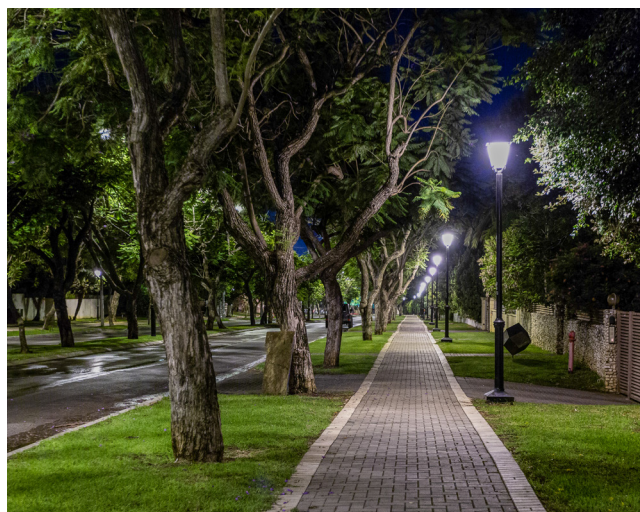

Orris Basic,
Savion, Israel



Bell,
Riga, Latvia

Floodlighting




RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body: Die-cast aluminium
Dimming: DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming
CRI: >70 / >80 / >90
Temperature: -40 up to +50 °C ¹⁾
Lifetime: Up to 100 000 h (L98B10) at Ta = 25 °C
Warranty: 5 years

Mounting: On bracket / Wall / Ceiling
Socket: NEMA Top / Zhaga Top and Bottom
Intelligent control: Stand-alone / Group / CMS
Sensor: Motion / Motion + Daylight / Daylight
Surge protection: 4 / 6 / 10 kV
Corrosion protection: Up to C5

¹⁾ Operating temperature differs depending on chosen output wattage

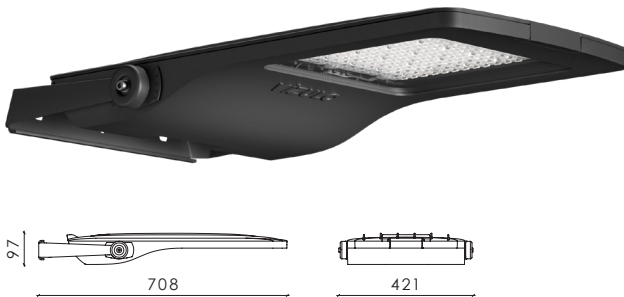


STORK FLOOD

Power: 5 - 280 W
Voltage: 198 - 264 / 110 - 277 V, 50 - 60 Hz
Lumen output: Up to 41 000 lm
CCT: 2700 / 3000 / 4000 / TW 2700 - 6500 K ²⁾
Installation: Tool-less
Nature friendly: PC Amber / Red / 1800 K
Neto weight: Up to 14.3 kg



STORK LITTLE BROTHER FLOOD ³⁾

Power: 5 - 200 W
Voltage: 198 - 264 / 110 - 277 / 90 - 305 V, 50 - 60 Hz
Lumen output: Up to 29 512 lm
CCT: 2700 / 3000 / 4000 / TW 2700 - 6500 K ²⁾
Installation: Tool-less
Nature friendly: PC Amber / Red / 1800 K
Neto weight: Up to 7 kg

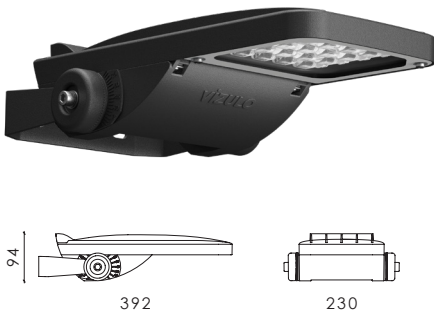


STORK LITTLE SISTER FLOOD ³⁾

Power: 5 - 80 W
Voltage: 198 - 264 / 110 - 277 V, 50 - 60 Hz
Lumen output: Up to 10 500 lm
CCT: 2700 / 3000 / 4000 K ²⁾
Installation: Tool-less
Nature friendly: PC Amber / Red / 1800 K
Neto weight: Up to 3.5 kg


²⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT
 Note! Only fixtures with CCT of 3000 K or lower are DarkSky approved!

³⁾ Smooth luminaire versions available. Please visit our website for detailed information



MINI MARTIN FLOOD ⁴

Power:	5 - 145 W
Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz
Lumen output:	Up to 18 540 lm
CCT:	2700 / 3000 / 4000 / TW 2700 - 6500 K ⁸
Installation:	Pre-wired cable 30 cm
Neto weight:	Up to 6.5 kg




MICRO MARTIN FLOOD ⁴

Power:	5 - 115 W
Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz
Lumen output:	Up to 14 371 lm
CCT:	2700 / 3000 / 4000 K ⁸
Installation:	Pre-wired cable 30 cm
Neto weight:	Up to 4.3 kg



COLIBRI FLOOD

Power:	5 - 45 W
Voltage:	220 - 240 / 110 - 277 V, 50 - 60 Hz
Lumen output:	Up to 6 028 lm
CCT:	2700 / 3000 / 4000 K ¹²
Installation:	Pre-wired cable 30 cm
Neto weight:	Up to 2.9 kg



COLIBRI MIDI FLOOD

Power:	5 - 87 W
Voltage:	220 - 240 / 110 - 277 V, 50 - 60 Hz
Lumen output:	Up to 13 100 lm
CCT:	2700 / 3000 / 4000 K ¹²
Installation:	Pre-wired cable 30 cm
Neto weight:	Up to 4.6 kg

⁴ Smooth and tool-less luminaire versions available. Please visit our website for detailed information

⁵ Depending on the configuration. Please contact VIZULO export representatives for additional information

⁶ Coming soon

⁷ Available only for Tool-less and Tool-less Smooth versions

⁸ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

Mustang



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body: Die-cast aluminium
Power: 50 - 700 W
Dimming: DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming
Voltage: 198 - 264 / 110 - 277 V, 50 - 60 Hz
Lumen output: Up to 103 320 lm
CRI: >70 / >80 / >90³⁾
CCT: 2700 / 3000 / 4000 K³⁾
Temperature: -40 to +50 °C

Lifetime: Up to 100 000 h (L90B10) at Ta = 25 °C
Warranty: 5 years
Installation: On bracket / Wall / Ceiling
Socket: NEMA Top / Zhaga Top
Intelligent control: Stand-alone / Group / CMS
Sensor: Daylight
Surge protection: 10 kV
Corrosion protection: Up to C5
Neto weight: Up to 41 kg

¹⁾ IK08 refers to version with glass cover, IK09 refers to version with housing

²⁾ Coming soon


³⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT



Standard console



Floodlight console

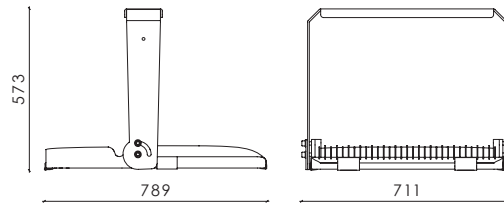

Mustang,
Riga International Airport,
Latvia



Owl



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body: Die-cast aluminium
Power: 85 - 380 W
Dimming: DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming
Voltage: 198 - 264 / 110 - 277 V, 50 - 60 Hz
Lumen output: Up to 55 455 lm
CRI: >70 / >80 / >90 ¹⁾
CCT: 2700 / 3000 / 4000 ²⁾
Temperature: -40 up to +50 °C ³⁾

Lifetime: Up to 100 000 h (L90B10) at Ta = 25 °C
Warranty: 5 years
Installation: On bracket / Wall / Ceiling
Socket: NEMA Top / Zhaga Top
Intelligent Control: Stand-alone / Group / CMS
Sensor: Daylight
Surge protection: 10 kV
Corrosion protection: Up to C5
Neto weight: Up to 19 kg

¹⁾ Coming soon

²⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

³⁾ Operating temperature differs depending on chosen output wattage



↙
 Owl,
 Courchevel,
 France

Eagle family



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body: Die-cast aluminium
Dimming: DALI / 1-10 V / DMX / Midnight dimming / Step dimming / Mains dimming
Voltage: 198 - 264 / 110 - 277 V, 50 - 60 Hz
CRI: >70 / >80 / >90 ¹⁾
CCT: 2700 / 3000 / 4000 ¹⁾
TLCI: >90 ²⁾
Temperature: -40 to +50 °C


Lifetime: Up to 100 000 h (L98B10) at Ta = 25 °C
Warranty: 5 years
Installation: On bracket / Wall / Ceiling
Socket: NEMA Top / Zhaga Top
Intelligent control: Stand-alone / Group / CMS
Sensor: Daylight
Surge protection: 10 kV
Corrosion protection: Up to C5

¹⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT


²⁾ For CRI > 90 and CCT 5000, 5700 K

MOUNTING OPTIONS


Surface



Post top



Wall

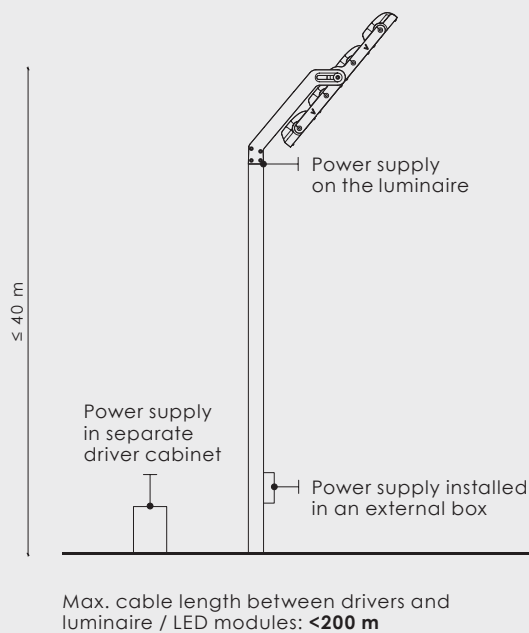


Eagle,
Stade Mathieu Bodmer,
Evreux, France






EAGLE 1 HEAD

Power: 255 - 600 W
Lumen output: Up to 79 160 lm
Weight: Up to 15.8 kg

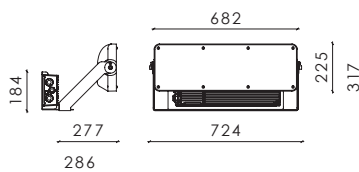


EAGLE 2 HEADS

Power: 510 - 1 200 W
Lumen output: Up to 156 575 lm
Weight: Up to 24.3 kg

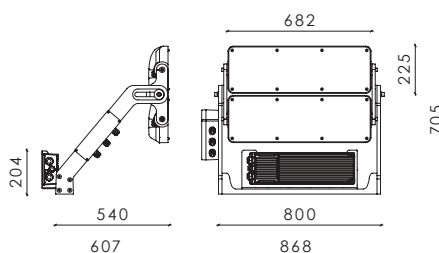


EAGLE 3 HEADS

Power: 765 - 1 800 W
Lumen output: Up to 228 472 lm
Weight: Up to 33.1 kg

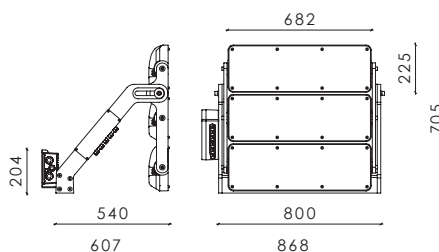

EAGLE 4 HEADS

Power: 1 020 - 2 400 W
Lumen output: Up to 301 450 lm
Weight: Up to 41.7 kg

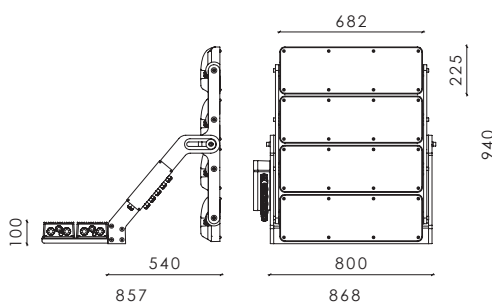

Nightjar family



IP66

IK09

UK
CA

RoHS

STAINLESS
STEEL

Body: AISI 316L
Dimming: DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming
Voltage: 198 - 264 / 110 - 277 V, 50 - 60 Hz
CRI: >70 / >80 / >90 ¹²
CCT: 2700 / 3000 / 4000 ¹²
Temperature: -40 up to +50 °C ¹³
Lifetime: Up to 100 000 h (L98B10) at Ta = 25 °C
Warranty: 5 years



Installation: Tool-less with safety screw
Mounting: Oogland 300 / 400 / 500 / 600 mm
 Wall ¹⁴ / Ceiling ¹⁴ / On rod
Intelligent control: Tunnel CMS
Surge protection: 4 / 6 / 10 kV
Corrosion protection: CX
Power factor: ≥ 0.97 at full load
Neto weight: Up to 33.5 kg

¹⁾ Coming soon

²⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT



³⁾ Operating temperature differs depending on chosen output wattage

⁴⁾ Brackets with fixed or adjustable angle for wall and ceiling mounting

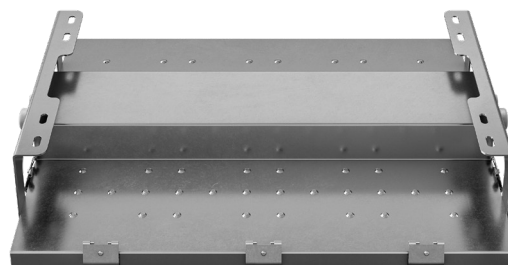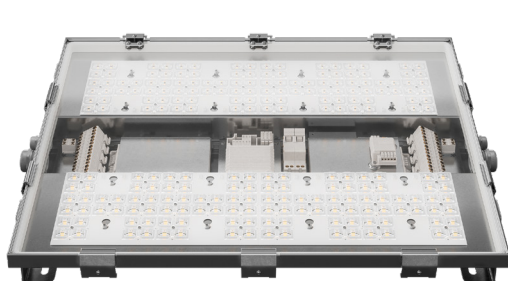



NIGHTJAR SMALL

Power: 5 - 180 W
Lumen output: Up to 26 508 lm





NIGHTJAR MEDIUM

Power: 5 - 360 W
Lumen output: Up to 47 969 lm



NIGHTJAR LARGE

Power: 5 - 540 W
Lumen output: Up to 79 041 lm

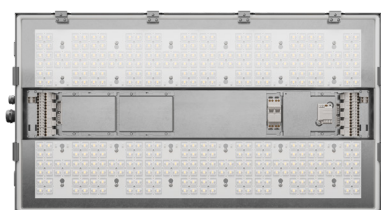

References



↘
Woodpecker & Heron,
Wagga Wagga,
Australia



↘
Blackbird Flood,
Deventer Hospital,
Netherlands

vizULO

Bukultu street 11
Riga, LV – 1005, Latvia

Sales: + 371 67 383 023
Production: + 371 67 383 024

sales@vizulo.com
www.vizulo.com



VIZULO



VIZULO



VIZULOSOLUTIONS