

EXTERIOR

TECHNICAL

content

06	Stork family
10	Martin family
12	Colibri family
13	Blackbird family
16	Luscinia family
18	Lapwing family
20	Blackbird family
24	Woodpecker
25	Heron
26	The Botanist's Bellflower
27	Orris Basic, Lilly
28	Floodlighting
30	Mustang
31	Owl
32	Eagle family

References



↘
Daudera Park,
Riga, Latvia



↘
Luscinia Post Top,
Lagerlundparken,
Norrkoping, Sweden



↘
Folkparken,
Norrkoping,
Sweden



↘
Blackbird
Side-entry, Tool-less,
Viesturdarzs, Riga,
Latvia

Stork family



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body:	Die-cast aluminium	Installation:	Tool-less
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Spigot:	ø 40 - 60 mm / 60 - 76 mm
Voltage:	198 - 264 / 110 - 277 / 90 - 300 V, 50 - 60 Hz ¹⁾	Socket:	NEMA Top / Zhaga Top and Bottom
CRI:	>70 / >80 / >90 ¹²⁾	Intelligent control:	Stand-alone / Group / CMS
CCT:	2700 / 3000 / 4000 K ¹²⁾	Sensor:	Motion / Motion + Daylight / Daylight
Temperature:	-40 up to +55 °C	Surge protection:	4 / 6 / 10 kV
Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C	Nature friendly:	PC Amber / Red / 1800 K
Warranty:	5 years	Corrosion protection:	Up to C5


¹⁾ Extended Voltage Range (90 - 300 V) is available only for STORK LITTLE BROTHER range luminaires
²⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT
Note! Only fixtures with CCT of 3000 K or lower are DarkSky approved!

STORK RANGE




STORK

Power:	5 - 315 W
Lumen output:	Up to 48 200 lm
Weight:	Up to 13.8 kg



STORK SMOOTH

Power:	5 - 260 W
Lumen output:	Up to 40 670 lm
Weight:	Up to 13.8 kg



STORK LITTLE BROTHER RANGE



STORK LITTLE BROTHER

Power:	5 - 200 W
Lumen output:	Up to 31 540 lm
Weight:	Up to 7.5 kg



STORK LITTLE BROTHER ROUGH

Power:	161 - 230 W
Lumen output:	Up to 35 830 lm
Weight:	Up to 7.7 kg



STORK LITTLE BROTHER SMOOTH

Power:	5 - 190 W
Lumen output:	Up to 30 200 lm
Weight:	Up to 7.3 kg



Stork Little Brother, Gothenburg, Sweden

Stork family



Other colors on request


Body:	Die-cast aluminium	Installation:	Tool-less
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Spigot:	ø 32 - 40 mm / 40 - 60 mm / 60 - 76 mm
Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz	Socket:	NEMA Top / Zhaga Top and Bottom
CRI:	>70 / >80 / >90 ¹⁾	Intelligent control:	Stand-alone / Group / CMS
CCT:	2700 / 3000 / 4000 K ¹⁾	Sensor:	Motion / Motion + Daylight / Daylight
Temperature:	-40 up to +55 °C	Surge protection:	4 / 6 / 10 kV
Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C	Nature friendly:	PC Amber / Red / 1800 K
Warranty:	5 years	Corrosion protection:	Up to C5
		Weight:	Up to 5.8 kg

¹⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT
Note! Only fixtures with CCT of 3000 K or lower are DarkSky approved!

STORK LITTLE SISTER EXTENDED RANGE



smooth




4 console versions available



ø 60 mm ø 76 mm ø 60 mm ± 90° ø 76 mm ± 90°

STORK LITTLE SISTER EXTENDED SMOOTH

Power:	5 - 96 W
Lumen output:	Up to 14 990 lm



STORK LITTLE SISTER RANGE



with fins smooth




4 console versions available



ø 60 mm ø 76 mm ø 60 mm ± 90° ø 76 mm ± 90°


STORK LITTLE SISTER

Power:	5 - 96 W
Lumen output:	Up to 13 630 lm



STORK LITTLE SISTER SMOOTH

Power:	5 - 90 W
Lumen output:	Up to 12 900 lm



Stork Little Sister,
Budapest Ferenc Liszt
International Airport, Hungary

Martin family



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body:	Die-cast aluminium	Installation:	Tool-less
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Spigot:	ø 40 - 60 mm / 60 - 76 mm
Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz	Socket:	NEMA Top / Zhaga Top and Bottom
CRI:	>70 / >80 / >90 ¹⁾	Intelligent control:	Stand-alone / Group / CMS
CCT:	2700 / 3000 / 4000 K ²⁾	Sensor:	Motion / Motion + Daylight / Daylight
Temperature:	-40 up to +50 °C	Surge protection:	4 / 6 / 10 kV
Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C	Nature friendly:	PC Amber / Red / 1800 K
Warranty:	5 years	Corrosion protection:	Up to C5
		Weight:	Up to 6.5 kg


¹⁾ Depending on the configuration. Please contact VIZULO export representatives for additional information
²⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

MINI MARTIN RANGE



MINI MARTIN TOOL-LESS

Power: 5 - 145 W
Lumen output: Up to 19 755 lm




MICRO MARTIN RANGE




MICRO MARTIN TOOL-LESS

Power: 5 - 115 W
Lumen output: Up to 15 030 lm



MICRO MARTIN TOOL-LESS | SMOOTH

Power: 5 - 95 W
Lumen output: Up to 13 070 lm



Mini Martin,
Watkins St, Merewether,
Australia

Colibri family



Other colors on request


Body:	Die-cast aluminium	Warranty:	5 years
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Installation:	Pre-wired cable 30 cm
CRI:	>70 / >80 / >90 ¹⁾	Socket:	NEMA Top / Zhaga Top and Bottom
CCT:	2700 / 3000 / 4000 K ¹⁾	Intelligent control:	Stand-alone / Group / CMS
Temperature:	-40 up to +55 °C	Sensor:	Motion / Motion + Daylight / Daylight
Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C	Surge protection:	4 / 6 / 10 kV
		Corrosion protection:	Up to C5

¹⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT
Note! Only fixtures with CCT of 3000 K or lower are DarkSky approved!




COLIBRI

Power:	5 - 50 W
Voltage:	198 - 264 V, 50 - 60 Hz
Lumen output:	Up to 7 025 lm
Spigot:	40 - 60 mm
Weight:	Up to 2.3 kg



COLIBRI MIDI

Power:	5 - 87 W
Voltage:	220 - 240 V, 50 - 60 Hz
Lumen output:	Up to 13 100 lm
Spigot:	ø 42 mm / 48 mm / 60 mm / 76 mm
Weight:	Up to 4.6 kg



Blackbird family



Other colors on request

Body:	Die-cast aluminium	Warranty:	5 years
Power:	5 - 100 W	Installation:	Tool-less / Pre-wired cable 30 cm
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Socket:	NEMA Top / Zhaga Top and Bottom
Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz	Intelligent control:	Stand-alone / Group / CMS
CRI:	>70 / >80 / >90 ¹⁾	Sensor:	Motion / Motion + Daylight / Daylight
CCT:	2700 / 3000 / 4000 K ¹⁾	Surge protection:	4 / 6 / 10 kV
Temperature:	-40 up to +50 °C	Corrosion protection:	Up to C5
Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C	Weight:	Up to 10.1 kg

¹⁾ Except Blackbird Mushroom screw version, which has IP65
²⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT
Note! Only fixtures with CCT of 3000 K or lower are DarkSky approved!



Blackbird Flood,
Deventer Hospital,
Netherlands



screw version



tool-less version



with HALO


Blackbird family

URBAN




BLACKBIRD SIDE ENTRY (SCREW / TOOL-LESS VERSION)

Lumen output: Up to 16 220 lm
Spigot: ø 40 - 60 mm / 60 - 76 mm




BLACKBIRD POST TOP (SCREW / TOOL-LESS VERSION)

Lumen output: Up to 16 220 lm
Spigot: ø 40 - 60 mm / 60 - 76 mm




BLACKBIRD HANGING (SCREW / TOOL-LESS VERSION)

Lumen output: Up to 16 220 lm
Mounting: On wire ø 5 - 12 mm




BLACKBIRD TOP ENTRY (SCREW / TOOL-LESS VERSION)

Lumen output: Up to 16 220 lm
Mounting: On console with G3/4 | G1/2 | M32 thread




BLACKBIRD SCEPTER (SCREW / TOOL-LESS VERSION)

Lumen output: Up to 16 220 lm
Mounting: On scepter M20




BLACKBIRD MUSHROOM (SCREW / TOOL-LESS VERSION)

Lumen output: Up to 14 700 lm
Spigot: ø 40 - 60 mm / 60 - 76 mm



BLACKBIRD FLOOD (SCREW / TOOL-LESS VERSION)

Lumen output: Up to 16 220 lm
Mounting: On bracket / wall / ceiling



Blackbird Side Entry Halo,
Frantorp, Gothenburg,
Sweden

Luscinia family



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body: Die-cast aluminium
Power: 5 - 80 W
Dimming: DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming
Voltage: 198 - 264 / 110 - 277 V, 50 - 60 Hz
Lumen output: Up to 12 890 lm
CRI: >70 / >80 / >90 ¹²
CCT: 2700 / 3000 / 4000 K ¹²
Temperature: -40 up to +55 °C

Lifetime: Up to 100 000 h (L98B10) at Ta = 25 °C
Warranty: 5 years
Installation: Pre-wired cable 30 cm
Socket: NEMA Top / Zhaga Top and Bottom
Intelligent control: Stand-alone / Group / CMS
Sensor: Motion / Motion + Daylight / Daylight
Surge protection: 4 / 6 / 10 kV
Corrosion protection: Up to C5

¹⁾ The Byggsvarubedömningen certificate available only for LUSCINIA Post top luminaires

²⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT



Luscinia Post Top
with opal glass


Luscinia Post Top

Luscinia Post Top
with LED cover plate

Luscinia Post Top
with Cap accessory


LUSCINIA POST TOP

Spigot: ø 40 - 60 mm / 60 - 76 mm
Weight: Up to 6.5 kg

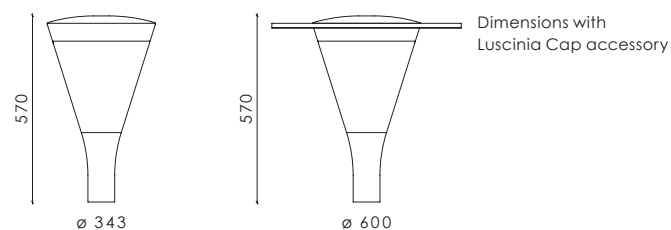


LUSCINIA TOP ENTRY

Mounting: On console with G3/4 | G1/2 | M32 thread
Weight: Up to 6 kg

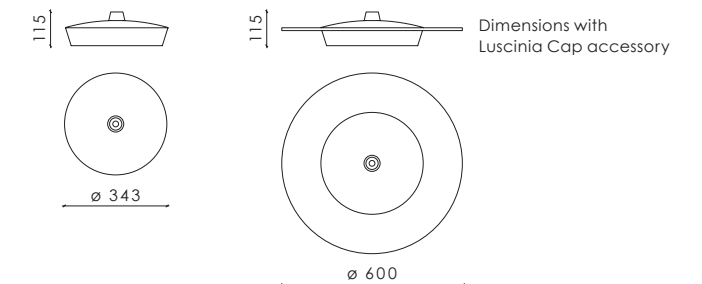


LUSCINIA HANGING

Mounting: On wire ø 5 - 12 mm
Weight: Up to 5.6 kg

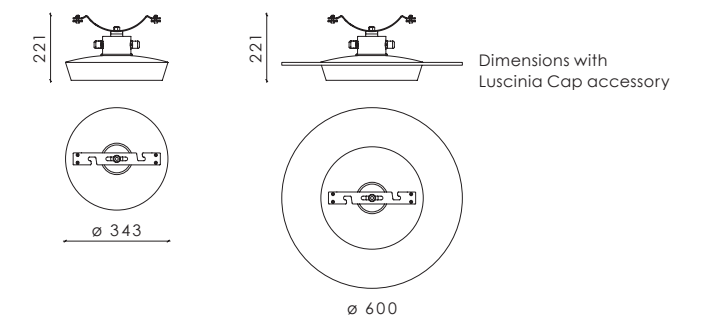

LUSCINIA SIDE ENTRY

Spigot: ø 40 - 60 mm / 60 - 76 mm
Weight: Up to 6.5 kg



Lapwing family



RAL7035 RAL9006 DB703 RAL9005

Other colors on request


Body:	Die-cast aluminium	Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C
Power:	5 - 150 W	Warranty:	5 years
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Installation:	Tool-less
Voltage:	198 - 264 / 120 - 277 V, 50 - 60 Hz	Socket:	NEMA Top / Zhaga Top and Bottom
Lumen output:	Up to 24 057 lm	Intelligent control:	Stand-alone / Group / CMS
CRI:	>70 / >80 / >90 ¹⁾	Sensor:	Motion / Motion + Daylight / Daylight
CCT:	2700 / 3000 / 4000 K ²⁾	Surge protection:	4 / 6 / 10 kV
Temperature:	-40 up to +55 °C	Nature friendly:	PC Amber / Red / 1800 K
		Corrosion protection:	Up to C5

¹⁾ Coming soon
²⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT





LAPWING Y-TYPE | TOOL-LESS

Spigot: ø 40 - 60 mm / 60 - 76 mm
Weight: Up to 14.1 kg




LAPWING J-TYPE | TOOL-LESS

Spigot: ø 40 - 60 mm / 60 - 76 mm
Weight: Up to 13.3 kg




LAPWING HANGING | TOOL-LESS

Mounting: On wire ø 5 - 12 mm
Weight: Up to 12.5 kg




LAPWING SIDE ENTRY | TOOL-LESS

Spigot: ø 40 - 60 mm / 60 - 76 mm
Weight: Up to 11.9 kg



LAPWING TOP ENTRY | TOOL-LESS

Mounting: On console with G3/4 | G1/2 | M32 thread
Weight: Up to 11.2 kg



LAPWING MUSHROOM | TOOL-LESS

Spigot: ø 40 - 60 mm / 60 - 76 mm
Weight: Up to 10.3 kg



↘
Lapwing Mushroom | Tool-less,
Klockaretorpet, Norrköping,
Sweden

Blackbird family



MICA 3602
MF/MA
Other colors on request


Body:	Die-cast aluminium	Temperature:	-40 up to +50 °C
Power:	5 - 30 W	Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Warranty:	5 years
Voltage:	198 - 264 V, 50 - 60 Hz	Installation:	Pre-wired cable 30 cm
Lumen output:	Up to 3 900 lm	Socket:	External Zhaga Top and Bottom ¹⁾
CRI:	>70 / >80 / >90 ¹²⁾	Surge protection:	4 / 6 / 10 kV
CCT:	2700 / 3000 / 4000 K ¹²⁾	Nature friendly:	PC Amber / Red / 1800 K
		Corrosion protection:	Up to C5

¹⁾ Coming soon
²⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT
³⁾ Possible with Zhaga Top console or Zhaga expansion for BLACKBIRD MINI with adjustable consoles

Facade




BLACKBIRD MINI
FACADE MOUNT



Adjustable console




ZHAGA
TOP CONSOLE

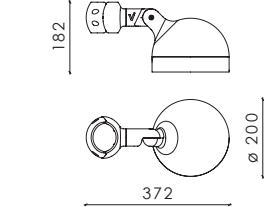

BLACKBIRD MINI
SPOT FLANGE MOUNT

ZHAGA
EXPANSION

BLACKBIRD MINI
SPOT BRACKET MOUNT



Blackbird family



MICA 3602
MF/MA

Other colors on request


Body:	Die-cast aluminium	Temperature:	-40 up to +50 °C
Power:	5 - 30 W	Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Warranty:	5 years
Voltage:	198 - 264 V, 50 - 60 Hz	Installation:	Tool-less / Pre-wired cable 30 cm
Lumen output:	Up to 3 900 lm	Socket:	Zhaga Top ¹²
CRI:	>70 / >80 / >90 ¹⁾	Surge protection:	4 / 6 / 10 kV
CCT:	2700 / 3000 / 4000 K ¹⁾	Nature friendly:	PC Amber / Red / 1800 K
		Corrosion protection:	Up to C5

¹⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT



²⁾ Available only for BLACKBIRD MINI Hanging and BLACKBIRD MINI Post top versions




BLACKBIRD MINI
TOP ENTRY TOOL-LESS




BLACKBIRD MINI
HANGING TOOL-LESS

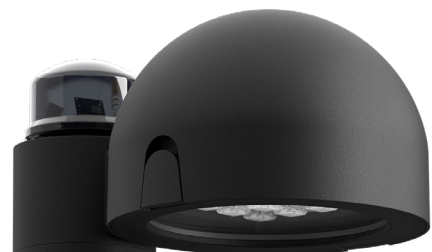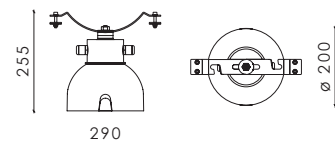

BLACKBIRD MINI POST-TOP
(SCREW / TOOL-LESS VERSION)
/ WITH ZHAGA /

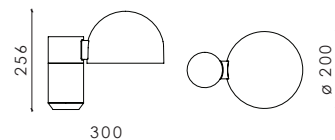

Bollards

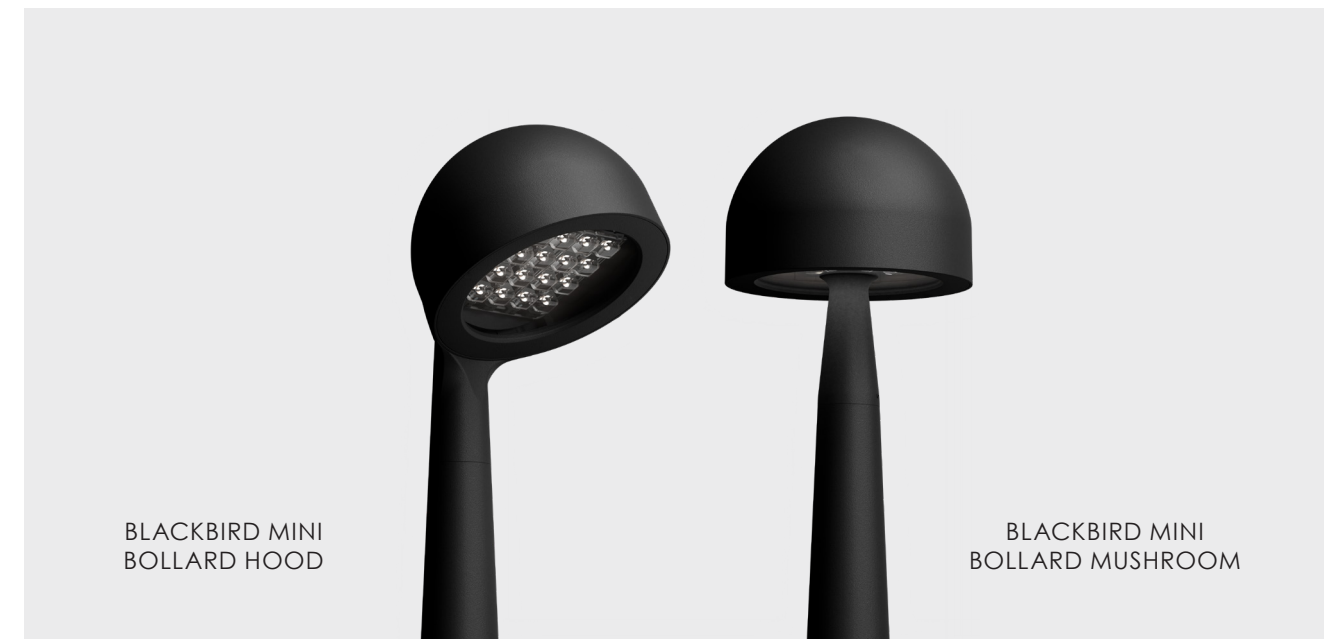

BLACKBIRD MINI
BOLLARD HOOD

BLACKBIRD MINI
BOLLARD MUSHROOM



Woodpecker




RAL9005

Body: Extruded aluminium
Power: 15 - 28 W | Small
20 - 52 W | Large
Dimming: DALI / 1-10 V / Midnight dimming /
Step dimming / Mains dimming
Voltage: 220 - 240 V, 50 - 60 Hz
Lumen output: Up to 7 500 lm
CRI: >70 / >80 / >90 ¹⁾
CCT: 2700 / 3000 / 4000 K ¹⁾
Temperature: -40 up to +50 °C
Lifetime: Up to 100 000 h (L98B10) at Ta = 25 °C

Warranty: 5 years
Mounting: On flange
Socket: NEMA Top / Zhaga Top and Bottom
Intelligent control: Stand-alone / Group / CMS
Sensor: Motion / Motion + Daylight / Daylight
Surge protection: 4 / 6 / 10 kV
Nature friendly: PC Amber / Red / 1800 K
Corrosion protection: Up to CX
Weight: Up to 0.9 kg | Small
Up to 1.6 kg | Large

¹⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

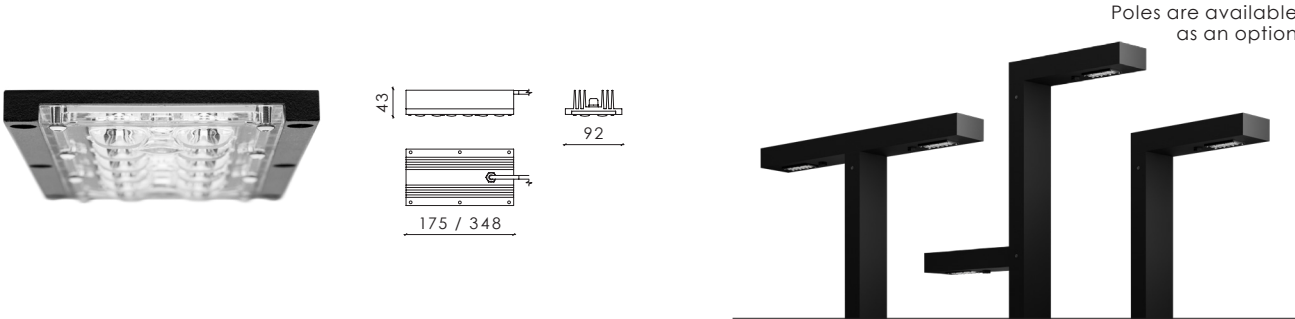

Robin & Rook



RAL9005


Body: Die-cast aluminium
Voltage: 220 - 240 V, 50 - 60 Hz
CRI: >70 / >80 / >90 ¹⁾
CCT: 2700 / 3000 / 4000 K ¹⁾
Temperature: -40 up to +40 °C
Lifetime: Up to 100 000 h (L98B10) at Ta = 25 °C

Warranty: 5 years
Mounting: On wall
Surge protection: 4 / 6 / 10 kV
Nature friendly: PC Amber / Red / 1800 K
Corrosion protection: Up to C5
Weight: Up to 3.3 kg

¹⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

ROBIN **IP66** **IK10**

Power: 8 - 26 W
Dimming DALI / Midnight dimming /
Non dimmable
Lumen output: Up to 3 350 lm

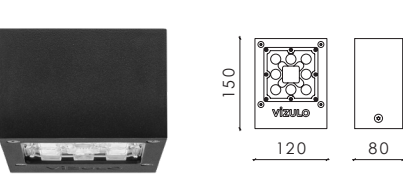

ROOK **IP65** **IK08**

Power: 15 - 28 W
Dimming DALI / 1-10 V / Midnight dimming /
Step dimming / Mains dimming
Lumen output: Up to 3 890 lm



Heron



RAL9006 DB703 RAL9005 GALVANIZED

Other colors on request

Body: Extruded Aluminium / Steel
Power: 4 - 26 W
Dimming: DALI / Midnight dimming /
Step dimming / Mains dimming
Voltage: 220 - 240 V, 50 - 60 Hz
Lumen output: Up to 3 920 lm
CRI: >70 / >80 / >90 ¹⁾
CCT: 2700 / 3000 / 4000 K ¹⁾
Temperature: -40 up to +40 °C
Lifetime: Up to 100 000 h (L98B10) at Ta = 25 °C

Warranty: 5 years
Installation: IP connector
Mounting: On flange
Intelligent control: Stand-alone / Group / CMS
Sensor: Motion / Motion + Daylight / Daylight
Surge protection: 1 / 2 / 4 / 10 kV
Nature friendly: PC Amber / Red / 1800 K
Corrosion protection: Up to C5
Weight: Up to 4.8 kg | Aluminium
Up to 15 kg | Steel

¹⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT



↙
Heron,
Wagga Wagga,
Australia

The Botanist's Bellflower




RAL7035 RAL9006 DB703 RAL9005

Other colors on request


Body:	Die-cast aluminium	Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C
Power:	5 - 85 W	Warranty:	5 years
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Installation:	Tool-less
Voltage:	220 - 240 V, 50 - 60 Hz	Socket:	Zhaga Bottom
Lumen output:	Up to 14 440 lm	Intelligent control:	Stand-alone / Group / CMS
CRI:	>70 / >80 / >90 ¹⁾	Sensor:	Daylight
CCT:	2700 / 3000 / 4000 K ²⁾	Surge protection:	4 / 6 / 10 kV
Temperature:	-40 up to +50 °C	Nature friendly:	PC Amber / Red / 1800 K
		Corrosion protection:	Up to C5

¹⁾ Coming soon
²⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT


THE BOTANIST'S BELLFLOWER WITH SKIRT

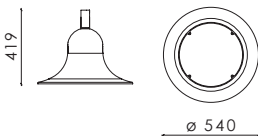


THE BOTANIST'S BELLFLOWER




THE BOTANIST'S BELLFLOWER TOP ENTRY WITH SKIRT

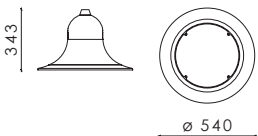


THE BOTANIST'S BELLFLOWER TOP ENTRY



THE BOTANIST'S BELLFLOWER HANGING WITH SKIRT

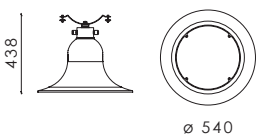

THE BOTANIST'S BELLFLOWER HANGING



Orris Basic & Lilly



RAL9005


Other colors on request

Body:	Die-cast aluminium	Warranty:	5 years
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Socket:	NEMA Top / Zhaga Top
Voltage:	220 - 240 V, 50 - 60 Hz	Intelligent control:	Stand-alone / Group / CMS
CRI:	>70 / >80 / >90 ¹⁾	Sensor:	Daylight
CCT:	2700 / 3000 / 4000 K ²⁾	Surge protection:	4 / 6 / 10 kV
Temperature:	-40 up to +50	Nature friendly:	PC Amber / Red / 1800 K
Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C	Corrosion protection:	Powder coating and primer

¹⁾ The DarkSky certificate is available only for ORRIS Basic luminaires
²⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

ORRIS BASIC


Power:	5 - 75 W
Lumen output:	Up to 8 920 lm
Spigot:	ø 40 - 60 mm
Weight:	Up to 7.6 kg

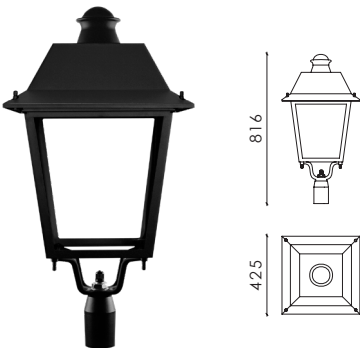

↙
Orris Basic,
Savion, Israel

LILLY

Power:	5 - 100 W
Lumen output:	Up to 12 475 lm
Spigot:	ø 60 - 75 mm / 76 - 80 mm
Weight:	Up to 10.1 kg

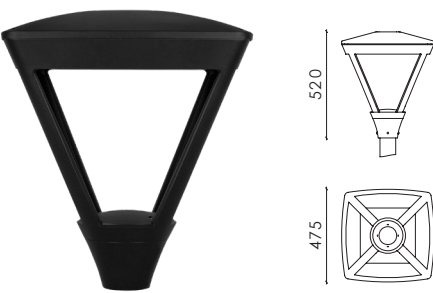

↙
Lilly,
Akureyri, Iceland

Floodlighting



RAL7035 RAL9006 DB703 RAL9005

Other colors on request


Body:	Die-cast aluminium	Warranty:	5 years
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Mounting:	On bracket / Wall / Ceiling
CRI:	>70 / >80 / >90	Socket:	NEMA Top / Zhaga Top and Bottom
CCT:	2700 / 3000 / 4000 K ¹⁾	Intelligent control:	Stand-alone / Group / CMS
Temperature:	-40 up to +50 °C	Sensor:	Motion / Motion + Daylight / Daylight
Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C	Surge protection:	4 / 6 / 10 kV
		Corrosion protection:	Up to C5

¹⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT
Note! Only fixtures with CCT of 3000 K or lower are DarkSky approved!



STORK FLOOD

Power:	5 - 315 W
Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz
Lumen output:	Up to 48 200 lm
Installation:	Tool-less
Nature friendly:	PC Amber / Red / 1800 K
Weight:	Up to 14.3 kg





STORK LITTLE BROTHER FLOOD (STANDARD / ROUGH)

Power:	5 - 230 W
Voltage:	198 - 264 / 110 - 277 / 90 - 300 V, 50 - 60 Hz
Lumen output:	Up to 35 830 lm
Installation:	Tool-less
Nature friendly:	PC Amber / Red / 1800 K
Weight:	Up to 7 kg




STORK LITTLE SISTER FLOOD

Power:	5 - 96 W
Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz
Lumen output:	Up to 13 630 lm
Installation:	Tool-less
Nature friendly:	PC Amber / Red / 1800 K
Weight:	Up to 3.5 kg

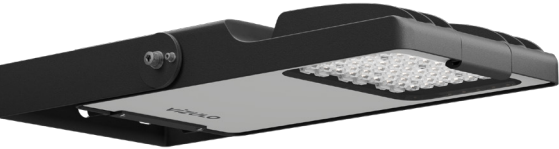


MINI MARTIN FLOOD TOOL-LESS

Power:	5 - 145 W
Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz
Lumen output:	Up to 19 755 lm
Installation:	Tool-less
Weight:	Up to 6.5 kg




MICRO MARTIN FLOOD TOOL-LESS

Power:	5 - 115 W
Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz
Lumen output:	Up to 15 030 lm
Installation:	Tool-less
Weight:	Up to 4.3 kg



COLIBRI MIDI FLOOD

Power:	5 - 87 W
Voltage:	220 - 240, 50 - 60 Hz
Lumen output:	Up to 13 100 lm
Installation:	Pre-wired cable 30 cm
Weight:	Up to 4.6 kg



COLIBRI FLOOD

Power:	5 - 50 W
Voltage:	198 - 264, 50 - 60 Hz
Lumen output:	Up to 7 025 lm
Installation:	Pre-wired cable 30 cm
Weight:	Up to 2.8 kg

Mustang



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body:	Die-cast aluminium	Lifetime:	Up to 100 000 h (L90B10) at Ta = 25 °C
Power:	50 - 700 W	Warranty:	5 years
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Mounting:	On bracket / Wall / Ceiling
		Socket:	NEMA Top / Zhaga Top
Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz	Intelligent control:	Stand-alone / Group / CMS
Lumen output:	Up to 103 320 lm	Sensor:	Daylight
CRI:	>70 / >80 / >90 ¹²	Surge protection:	10 kV
CCT:	2700 / 3000 / 4000 K ¹²	Corrosion protection:	Up to C5
Temperature:	-40 up to +50 °C	Weight:	Up to 41 kg

¹¹ IK08 refers to version with glass cover, IK09 refers to version with housing
²¹ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT




MUSTANG




MUSTANG with floodlight console

Dimensions with standard console



Dimensions with floodlight console

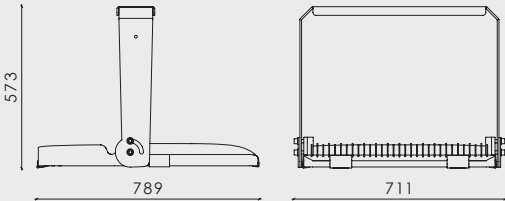

Mustang,
Riga International Airport,
Latvia

Owl



RAL7035 RAL9006 DB703 RAL9005


Other colors on request

Body:	Die-cast aluminium	Lifetime:	Up to 100 000 h (L90B10) at Ta = 25 °C
Power:	85 - 380 W	Warranty:	5 years
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Mounting:	On bracket / Wall / Ceiling
		Socket:	NEMA Top / Zhaga Top
Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz	Intelligent Control:	Stand-alone / Group / CMS
Lumen output:	Up to 57 660 lm	Sensor:	Daylight
CRI:	>70 / >80 / >90 ¹²	Surge protection:	10 kV
CCT:	2700 / 3000 / 4000 K ¹²	Corrosion protection:	Up to C5
Temperature:	-40 up to +50 °C	Weight:	Up to 19 kg

¹¹ Depending on configuration
²¹ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT



OWL with standard console

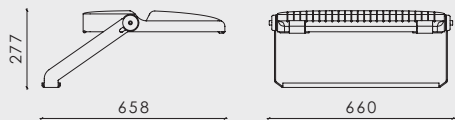

OWL with floodlight console



OWL high-bay



Owl,
Courchevel,
France

Eagle family






RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body:	Die-cast aluminium	Warranty:	5 years
Dimming:	DALI / 1-10 V / DMX	Mounting:	On bracket / Wall / Ceiling
Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz	Socket:	NEMA Top / Zhaga Top
CRI:	>70 / >80 / >90 ¹⁾	Intelligent control:	Stand-alone / Group / CMS
CCT:	4000 / 5000 / 5700 K ¹⁾	Sensor:	Daylight
TLCI:	>90 ²⁾	Surge protection:	10 kV
Temperature:	-40 up to +50 °C	Corrosion protection:	Up to C5
Lifetime:	Up to 100 000 h (L90B10) at Ta = 25 °C		


¹⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT
²⁾ For CRI > 90 and CCT 5000, 5700 K

MOUNTING OPTIONS

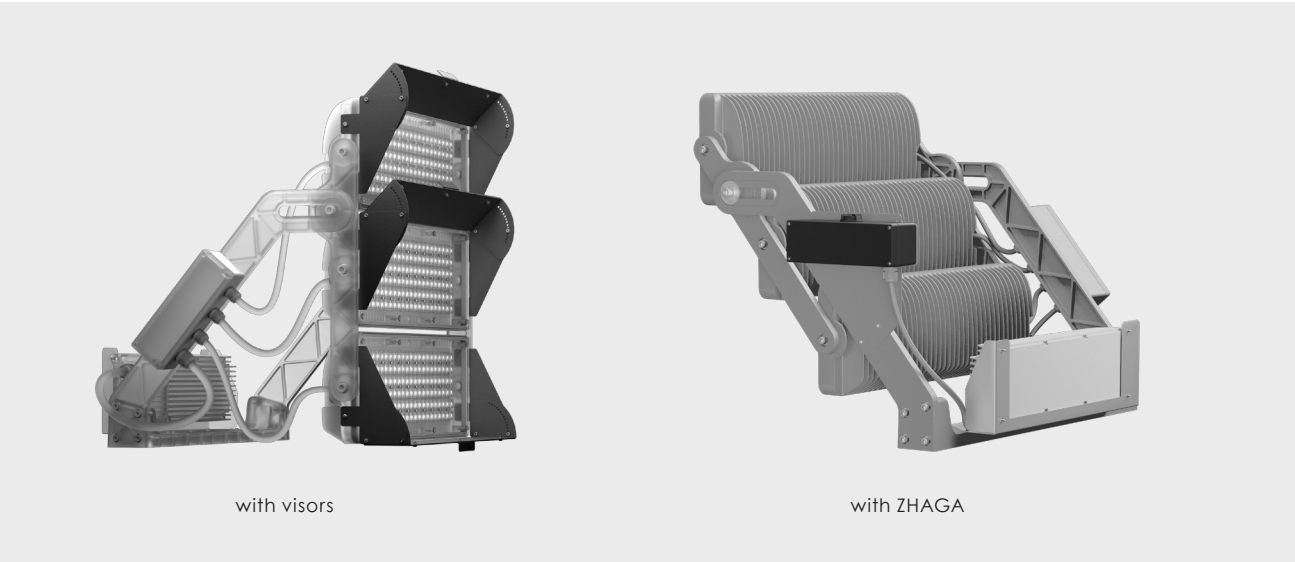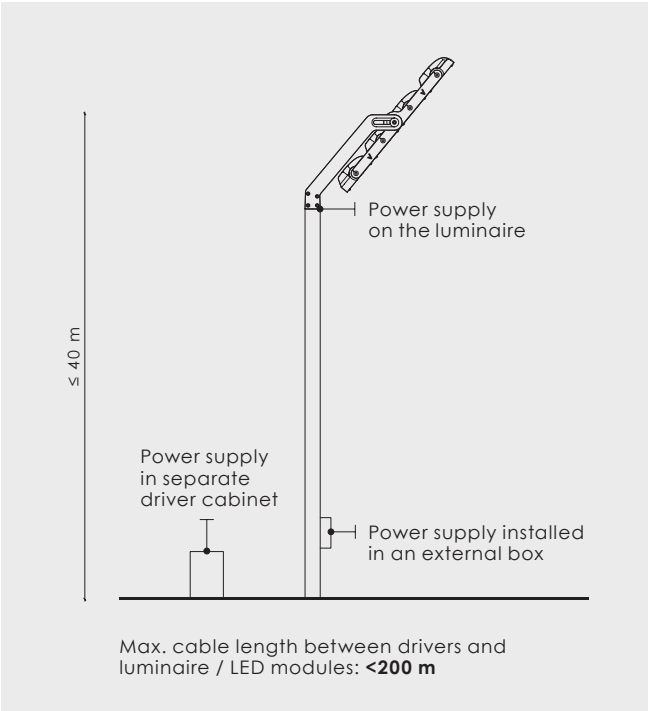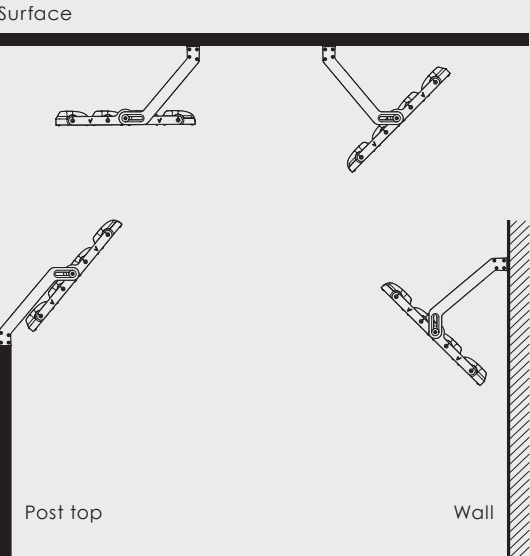


EAGLE 1 HEAD

Power:	255 - 600 W
Lumen output:	Up to 79 160 lm
Weight:	Up to 15.8 kg

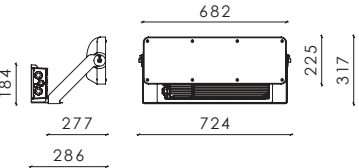


EAGLE 2 HEADS

Power:	510 - 1 200 W
Lumen output:	Up to 156 575 lm
Weight:	Up to 24.3 kg

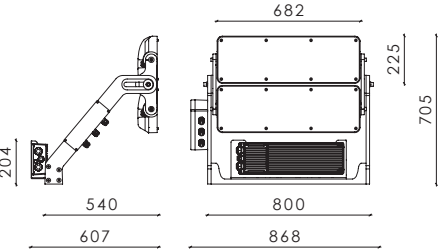


EAGLE 3 HEADS

Power:	765 - 1 800 W
Lumen output:	Up to 228 472 lm
Weight:	Up to 33.1 kg

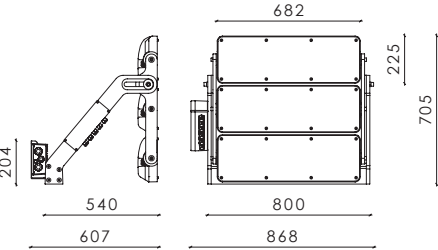

EAGLE 4 HEADS

Power:	1 020 - 2 400 W
Lumen output:	Up to 301 450 lm
Weight:	Up to 41.7 kg

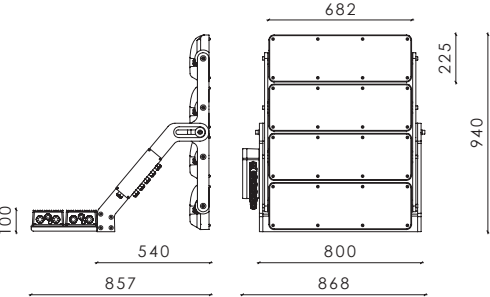

vizULO

Bukultu street 11
Riga, LV – 1005, Latvia

Sales: + 371 67 383 023
Production: + 371 67 383 024

sales@vizulo.com
www.vizulo.com



VIZULO



VIZULO



VIZULOSOLUTIONS