

EXTERIOR

TECHNICAL

content

06	Stork family
10	Martin family
12	Colibri family
13	Blackbird family
16	Luscinia family
18	Lapwing family
20	Blackbird family
24	Woodpecker
25	Heron
26	Bell
27	Orris Basic, Lilly
28	Floodlighting
30	Mustang
31	Owl
32	Eagle family

References



↘
Daudera Park,
Riga, Latvia



↘
Luscinia Post Top,
Lagerlundparken,
Norrkoping, Sweden



↘
Folkparken,
Norrkoping,
Sweden



↘
Blackbird
Side-entry, Tool-less,
Viesturdarzs, Riga,
Latvia

Stork family



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body:	Die-cast aluminium	Installation:	Tool-less
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Spigot:	ø 40 - 60 mm / 60 - 76 mm
Voltage:	198 - 264 / 110 - 277 / 90 - 300 V, 50 - 60 Hz ¹⁾	Socket:	NEMA Top / Zhaga Top and Bottom
CRI:	>70 / >80 / >90 ²⁾	Intelligent control:	Stand-alone / Group / CMS
CCT:	2700 / 3000 / 4000 ²⁾	Sensor:	Motion / Motion + Daylight / Daylight
Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C	Surge protection:	4 / 6 / 10 kV
Warranty:	5 years	Nature friendly:	PC Amber / Red / 1800 K
Temperature:	-40 up to +55 °C ³⁾	Corrosion protection:	Up to C5
		Neto weight:	Up to 13.8 kg

¹⁾ Extended Voltage Range (90 - 300 V) is available only for STORK LITTLE BROTHER range luminaires
²⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT
Note! Only fixtures with CCT of 3000 K or lower are DarkSky approved!
³⁾ Operating temperature differs depending on chosen output wattage

STORK RANGE




STORK

Power: 5 - 315 W
Lumen output: Up to 48 200 lm



STORK SMOOTH

Power: 5 - 260 W
Lumen output: Up to 40 670 lm



STORK LITTLE BROTHER RANGE



with fins rough smooth



4 console versions available



STORK LITTLE BROTHER

Power: 5 - 200 W
Lumen output: Up to 31 540 lm



STORK LITTLE BROTHER ROUGH

Power: 161 - 230 W
Lumen output: Up to 35 830 lm



STORK LITTLE BROTHER SMOOTH

Power: 5 - 190 W
Lumen output: Up to 30 200 lm



Stork Little Brother,
Gothenburg,
Sweden

Stork family



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body:	Die-cast aluminium	Installation:	Tool-less
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Spigot:	ø 32 - 40 / 40 - 60 mm / 60 - 76 mm
Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz	Socket:	NEMA Top / Zhaga Top and Bottom
CRI:	>70 / >80 / >90 ¹⁾	Intelligent control:	Stand-alone / Group / CMS
CCT:	2700 / 3000 / 4000 K ¹⁾	Sensor:	Motion / Motion + Daylight / Daylight
Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C	Surge protection:	4 / 6 / 10 kV
Warranty:	5 years	Nature friendly:	PC Amber / Red / 1800 K
Temperature:	-40 up to +55 °C ²⁾	Corrosion protection:	Up to C5
		Neto weight:	Up to 5.8 kg


¹⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT
Note! Only fixtures with CCT of 3000 K or lower are DarkSky approved!
²⁾ Operating temperature differs depending on chosen output wattage

STORK LITTLE SISTER RANGE




STORK LITTLE SISTER

Power: 5 - 96 W
Lumen output: Up to 13 630 lm



STORK LITTLE SISTER SMOOTH


Power: 5 - 90 W
Lumen output: Up to 12 900 lm



STORK LITTLE SISTER EXTENDED RANGE



smooth




4 console versions available



STORK LITTLE SISTER EXTENDED SMOOTH

Power: 5 - 96 W
Lumen output: Up to 14 990 lm



Stork Little Sister,
Budapest Ferenc Liszt
International Airport, Hungary

Martin family



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body:	Die-cast aluminium	Installation:	Tool-less / Pre-wired cable 30 cm
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Spigot:	ø 40 - 60 / 60 - 76 mm
Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz	Socket:	NEMA Top / Zhaga Top and Bottom
CRI:	>70 / >80 / >90	Intelligent control:	Stand-alone / Group / CMS
CCT:	2700 / 3000 / 4000 ⁽³⁾	Sensor:	Motion / Motion + Daylight / Daylight
Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C	Surge protection:	4 / 6 / 10 kV
Warranty:	5 years	Nature friendly:	PC Amber / Red / 1800 K
Temperature:	-40 up to +50 °C ⁽⁴⁾	Corrosion protection:	Up to C5
		Neto weight:	Up to 6.5 kg


¹⁾ Depending on the configuration. Please contact VIZULO export representatives for additional information
²⁾ Coming soon
³⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT
⁴⁾ Operating temperature differs depending on chosen output wattage

MINI MARTIN GEN 2 RANGE




MINI MARTIN TOOL-LESS

Power: 5 - 145 W
Lumen output: Up to 19 755 lm



MINI MARTIN TOOL-LESS SMOOTH

Power: 5 - 130 W
Lumen output: Up to 17 480 lm




MICRO MARTIN RANGE




MICRO MARTIN (SCREW / TOOL-LESS VERSION)

Power: 5 - 115 W
Lumen output: Up to 15 030 lm



MICRO MARTIN SMOOTH (SCREW / TOOL-LESS VERSION)

Power: 5 - 95 W
Lumen output: Up to 13 070 lm



Mini Martin,
Watkins St, Merewether,
Australia

Colibri family



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body: Die-cast aluminium
Dimming: DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming
Voltage: 220 - 240 / 110 - 277 V, 50 - 60 Hz
CRI: >70 / >80 / >90 ¹⁾
CCT: 2700 / 3000 / 4000 K ²⁾
Lifetime: Up to 100 000 h (L98B10) at Ta = 25 °C
Warranty: 5 years
Temperature: -40 up to +50 °C ³⁾

Installation: Pre-wired cable 30 cm
Spigot: ø 42 mm / 60 mm / 76 mm
Socket: NEMA Top / Zhaga Top and Bottom
Intelligent control: Stand-alone / Group / CMS
Sensor: Motion / Motion + Daylight / Daylight
Surge protection: 4 / 6 / 10 kV
Corrosion protection: Up to C5
Neto weight: Up to 4.2 kg

¹⁾ IK09 can be reached with clear glass

²⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT



Note! Only fixtures with CCT of 3000 K or lower are DarkSky approved!

³⁾ Operating temperature differs depending on chosen output wattage



COLIBRI


Power: 5 - 50 W
Lumen output: Up to 7 025 lm



Possible regulation angles

COLIBRI MIDI

Power: 5 - 87 W
Lumen output: Up to 13 100 lm



Blackbird family



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body: Die-cast aluminium
Power: 5 - 100 W
Dimming: DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming
Voltage: 198 - 264 / 110 - 277 V, 50 - 60 Hz
CRI: >70 / >80 / >90 ²⁾
CCT: 2700 / 3000 / 4000 K ²⁾
Temperature: -40 up to +50 °C ³⁾
Lifetime: Up to 100 000 h (L98B10) at Ta = 25 °C

Warranty: 5 years
Installation: Tool-less / Pre-wired cable 30 cm
Socket: NEMA Top / Zhaga Top and Bottom
Intelligent control: Stand-alone / Group / CMS
Sensor: Motion / Motion + Daylight / Daylight
Surge protection: 4 / 6 / 10 kV
Corrosion protection: Up to C5
Neto weight: Up to 10.1 kg

¹⁾ Except Blackbird Mushroom screw version, which has IP65

²⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

Note! Only fixtures with CCT of 3000 K or lower are DarkSky approved!

³⁾ Operating temperature differs depending on chosen output wattage



screw version



tool-less version



with HALO



Blackbird Flood,
Deventer Hospital,
Netherlands


Blackbird family

URBAN




BLACKBIRD SIDE ENTRY (SCREW / TOOL-LESS VERSION)

Lumen output: Up to 16 220 lm
Spigot: ø 40 - 60 mm / 60 - 76 mm




BLACKBIRD POST TOP (SCREW / TOOL-LESS VERSION)

Lumen output: Up to 16 220 lm
Spigot: ø 40 - 60 mm / 60 - 76 mm




BLACKBIRD HANGING (SCREW / TOOL-LESS VERSION)

Lumen output: Up to 16 220 lm
Mounting: On wire ø 5 - 12 mm




BLACKBIRD TOP ENTRY (SCREW / TOOL-LESS VERSION)

Lumen output: Up to 16 220 lm
Mounting: On console with M32 | G1/2 | G3/4 thread




BLACKBIRD SCEPTER (SCREW / TOOL-LESS VERSION)

Lumen output: Up to 16 220 lm
Mounting: On scepter M20




BLACKBIRD MUSHROOM (SCREW / TOOL-LESS VERSION)

Lumen output: Up to 14 700 lm
Spigot: ø 40 - 60 mm / 60 - 76 mm



BLACKBIRD FLOOD (SCREW / TOOL-LESS VERSION)

Lumen output: Up to 16 220 lm
Spigot: On bracket / wall / ceiling



Blackbird Side Entry Halo,
Frantorp, Gothenburg,
Sweden

Luscinia family



RAL7035 RAL9006 DB703 RAL9005

Other colors on request


Body:	Die-cast aluminium	Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C
Power:	5 - 80 W	Warranty:	5 years
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Installation:	Pre-wired cable 30 cm
Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz	Socket:	NEMA Top / Zhaga Top and Bottom
Lumen output:	Up to 12 890 lm	Intelligent control:	Stand-alone / Group / CMS
CRI:	>70 / >80 / >90 ⁽¹⁾	Sensor:	Motion / Motion + Daylight / Daylight
CCT:	2700 / 3000 / 4000 K ⁽¹⁾	Surge protection:	4 / 6 / 10 kV
Temperature:	-40 up to +55 °C ⁽²⁾	Corrosion protection:	Up to C5

¹⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT
²⁾ Operating temperature differs depending on chosen output wattage




LUSCINIA POST TOP

Spigot: ø 40 - 60 mm / 60 - 76 mm
Neto weight: Up to 6.5 kg

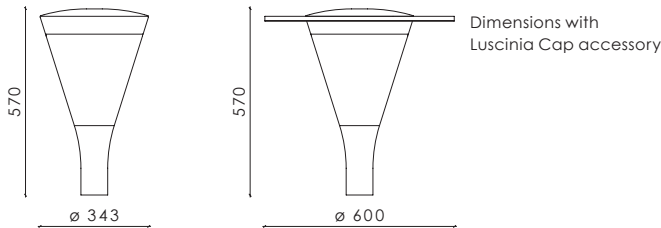


LUSCINIA TOP ENTRY

Mounting: On console with 1/2" thread
Neto weight: Up to 6 kg

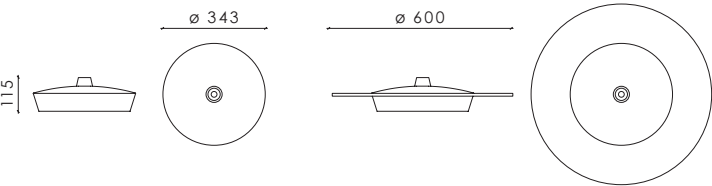


LUSCINIA HANGING

Mounting: On wire ø 5 - 12 mm
Neto weight: Up to 5.6 kg

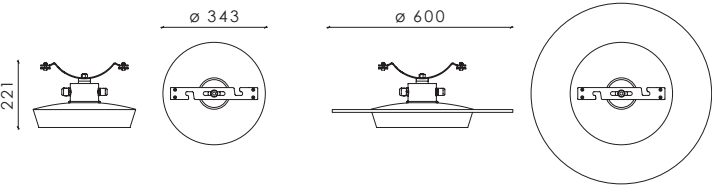

LUSCINIA SIDE ENTRY

Spigot: ø 40 - 60 mm / 60 - 76 mm
Neto weight: Up to 6.5 kg

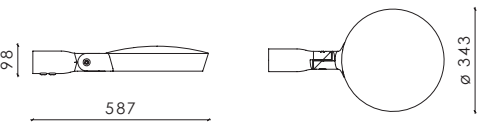

Lapwing family



RAL7035
RAL9006
DB703
RAL9005

Other colors on request


Body:	Die-cast aluminium	Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C
Power:	5 - 150 W	Warranty:	5 years
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Installation:	Tool-less
Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz	Socket:	NEMA Top / Zhaga Top and Bottom
Lumen output:	Up to 24 057 lm	Intelligent control:	Stand-alone / Group / CMS
CRI:	>70 / >80 / >90 ¹²	Sensor:	Motion / Motion + Daylight / Daylight
CCT:	2700 / 3000 / 4000 ¹²	Surge protection:	4 / 6 / 10 kV
Temperature:	-40 up to +55 °C ¹³	Nature friendly:	PC Amber / Red / 1800 K
		Corrosion protection:	Up to C5

¹¹ Coming soon
¹² 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT
¹³ Operating temperature differs depending on chosen output wattage





LAPWING Y-TYPE | TOOL-LESS

Spigot: ø 40 - 60 mm / 60 - 76 mm
Neto weight: Up to 14.1 kg




LAPWING J-TYPE | TOOL-LESS

Spigot: ø 40 - 60 mm / 60 - 76 mm
Neto weight: Up to 13.3 kg




LAPWING TOP ENTRY | TOOL-LESS

Mounting: On console with G1/2 or G3/4 thread
Neto weight: Up to 11.2 kg




LAPWING SIDE ENTRY | TOOL-LESS

Spigot: ø 40 - 60 mm / 60 - 76 mm
Neto weight: Up to 11.9 kg



LAPWING HANGING | TOOL-LESS

Mounting: On wire ø 5 - 12 mm
Neto weight: Up to 12.5 kg



LAPWING MUSHROOM | TOOL-LESS

Spigot: ø 40 - 60 mm / 60 - 76 mm
Neto weight: Up to 10.3 kg



COMING SOON

Blackbird family



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body:	Die-cast aluminium	Installation:	Pre-wired cable 30 cm
Voltage:	198 - 264 V, 50 - 60 Hz	Intelligent control:	Stand-alone / Group / CMS
CRI:	>70 / >80 / >90 ¹²	Sensor:	Motion / Motion + Daylight / Daylight
CCT:	2700 / 3000 / 4000 K ¹²	Surge protection:	4 / 6 / 10 kV
Temperature:	-40 to +50 °C	Nature friendly:	PC Amber / Red / 1800 K
Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C	Corrosion protection:	Up to C5
Warranty:	5 years		

¹¹) Coming soon
²¹) 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

BLACKBIRD MINI | ø 200 mm

Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming
Power:	5 - 30 W
Lumen output:	Up to 3 740 lm
Socket:	Zhaga Top and Bottom ¹³

³¹) Possible with Zhaga expansion for BLACKBIRD MINI Spots

BLACKBIRD MICRO | ø 120 mm

Dimming:	DALI / Non dimmable
Power:	5 - 12 W
Lumen output:	Up to 1 630 lm



BLACKBIRD MINI TOP ENTRY



BLACKBIRD MINI HANGING
/ WITH ZHAGA /

Spots



BLACKBIRD MICRO
SPOT BRACKET MOUNT

BLACKBIRD MINI
SPOT BRACKET MOUNT

BLACKBIRD MINI
SPOT FLANGE MOUNT

BLACKBIRD MICRO
SPOT FLANGE MOUNT

ZHAGA
EXPANSION

COMING SOON

Blackbird family



 RAL7035  RAL9006  DB703  RAL9005

Other colors on request

Body:	Die-cast aluminium	Installation:	Pre-wired cable 30 cm
Voltage:	198 - 264 V, 50 - 60 Hz	Intelligent control:	Stand-alone / Group / CMS
CRI:	>70 / >80 / >90 ¹²	Sensor:	Motion / Motion + Daylight / Daylight
CCT:	2700 / 3000 / 4000 K ¹²	Surge protection:	4 / 6 / 10 kV
Temperature:	-40 to +50 °C	Nature friendly:	PC Amber / Red / 1800 K
Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C	Corrosion protection:	Up to C5
Warranty:	5 years		

¹⁾ Coming soon
²⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

BLACKBIRD MINI | ø 200 mm

Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming
Power:	5 - 30 W
Lumen output:	Up to 3 740 lm

BLACKBIRD MICRO | ø 120 mm

Dimming:	DALI / Non dimmable
Power:	5 - 12 W
Lumen output:	Up to 1 630 lm

Bollards



BLACKBIRD MINI / MICRO
BOLLARD HOOD

Facade



BLACKBIRD MINI / MICRO HALF SPHERE FACADE



BLACKBIRD MINI / MICRO FACADE CONSOLE
/ WITH HALO /



/ 1200 mm /

/ 700 mm /


Woodpecker



Body: Extruded aluminium
Power: 15 - 28 W | Small
20 - 52 W | Large
Dimming: DALI / 1-10 V / Midnight dimming /
Step dimming / Mains dimming
Voltage: 220 - 240 V, 50 - 60 Hz
Lumen output: Up to 7 500 lm
CRI: >70 / >80 / >90 ¹⁾
CCT: 2700 / 3000 / 4000 ¹⁾
Temperature: -40 to +50 °C
Lifetime: Up to 100 000 h (L98B10) at Ta = 25 °C

Warranty: 5 years
Mounting: On flange
Socket: NEMA Top / Zhaga Top and Bottom
Intelligent control: Stand-alone / Group / CMS
Sensor: Motion / Motion + Daylight / Daylight
Surge protection: 4 / 6 / 10 kV
Nature friendly: PC Amber / Red / 1800 K
Corrosion protection: Up to CX
Neto weight: Up to 0.9 kg | Small
Up to 1.6 kg | Large

¹⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

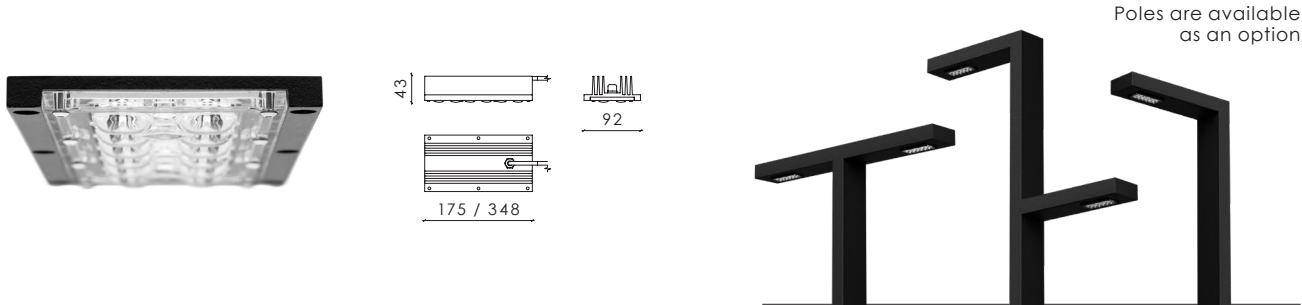

Robin & Rook




Body: Die-cast aluminium
Voltage: 220 - 240 V, 50 - 60 Hz
CRI: >70 / >80 / >90 ¹⁾
CCT: 2700 / 3000 / 4000 ¹⁾
Temperature: -40 to +40 °C
Lifetime: Up to 100 000 h (L98B10) at Ta = 25 °C

Warranty: 5 years
Mounting: On wall
Surge protection: 4 / 6 / 10 kV
Nature friendly: PC Amber / Red / 1800 K
Corrosion protection: Up to C5
Neto weight: Up to 3.3 kg

¹⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

ROBIN **IP66** **IK10**

Power: 8 - 26 W
Dimming DALI / Midnight dimming /
Non dimmable
Lumen output: Up to 3 350 lm

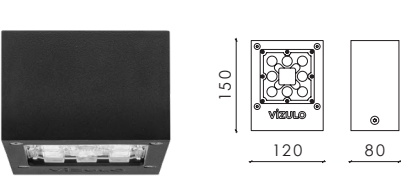

ROOK **IP65** **IK08**

Power: 15 - 28 W
Dimming DALI / 1-10 V / Midnight dimming /
Step dimming / Mains dimming
Lumen output: Up to 3 890 lm



Heron



Other colors on request

Body: Extruded Aluminium / Steel
Power: 8 - 26 W
Dimming: DALI / Midnight dimming
Voltage: 220 - 240 V, 50 - 60 Hz
Lumen output: Up to 3 350 lm
CRI: >70 / >80 / >90 ¹⁾
CCT: 2700 / 3000 / 4000 ¹⁾
Temperature: -40 to +40 °C

Lifetime: Up to 100 000 h (L98B10) at Ta = 25 °C
Warranty: 5 years
Installation: IP connector
Mounting: On flange
Surge protection: 1 / 2 / 4 / 10 kV
Nature friendly: PC Amber / Red / 1800 K
Corrosion protection: Up to C5
Neto weight: Up to 15 kg

¹⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT



↙
Heron,
Wagga Wagga,
Australia

Bell



IP54 / IP66⁽¹⁾

IK08 / IK10⁽²⁾



RoHS





RAL9005

Body:	Die-cast aluminium	Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C
Power:	5 - 82 W	Warranty:	5 years
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Mounting:	On console with ø 28 mm bracket
Voltage:	220 - 240 V, 50 - 60 Hz	Socket:	Zhaga Top
Lumen output:	Up to 12 125 lm	Intelligent control:	Stand-alone / Group / CMS
CRI:	>70 / >80 / >90 ⁽³⁾	Sensor:	Daylight
CCT:	2700 / 3000 / 4000 ⁽³⁾	Surge protection:	4 / 6 / 10 kV
Temperature:	-40 to +50 °C	Nature friendly:	PC Amber / Red / 1800 K
		Corrosion protection:	Up to CX
		Neto weight:	Up to 5.62 kg

¹⁾ ENEC update for IP66 coming soon
²⁾ IK08 refers to version with flat glass
³⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

Standard version



Flat glass version



↙
Bell,
Riga, Latvia

Orris Basic & Lilly



IP65

IK08



RoHS





RAL9005

Body:	Die-cast aluminium	Warranty:	5 years
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Intelligent control:	Stand-alone / Group / CMS
Voltage:	220 - 240 V, 50 - 60 Hz	Sensor:	Daylight
CRI:	>70 / >80 / >90 ⁽¹⁾	Surge protection:	4 / 6 / 10 kV
CCT:	2700 / 3000 / 4000 ⁽¹⁾	Nature friendly:	PC Amber / Red / 1800 K
Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C	Corrosion protection:	Up to CX

¹⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

ORRIS BASIC


IP65

IK08



Power:	5 - 75 W
Lumen output:	Up to 8 920 lm
Temperature:	-40 up to +50 ⁽²⁾
Socket:	NEMA Top / Zhaga Top
Spigot:	ø 40 - 60 mm
Neto weight:	Up to 7.6 kg

²⁾ Operating temperature differs depending on chosen output wattage

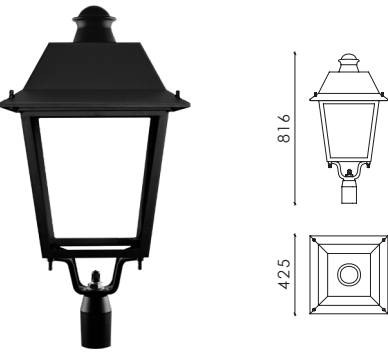


↙
Orris Basic,
Savion, Israel

LILLY

IP66

IK08

Power:	5 - 500 W
Lumen output:	Up to 12 475 lm
Temperature:	-40 up to +50
Socket:	NEMA Top / Zhaga Top
Spigot:	ø 60 - 75 mm / 76 - 80 mm
Neto weight:	Up to 10.1 kg

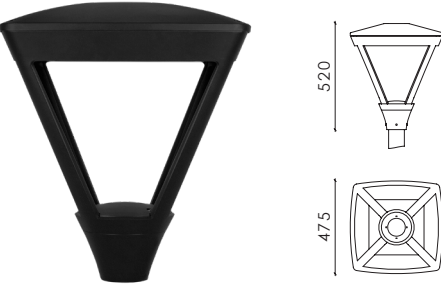

↙
Lilly,
Akureyri, Iceland

Floodlighting



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body:	Die-cast aluminium	Mounting:	On bracket / Wall / Ceiling
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Socket:	NEMA Top / Zhaga Top and Bottom
CRI:	>70 / >80 / >90	Intelligent control:	Stand-alone / Group / CMS
Temperature:	-40 up to +50 °C ¹⁾	Sensor:	Motion / Motion + Daylight / Daylight
Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C	Surge protection:	4 / 6 / 10 kV
Warranty:	5 years	Corrosion protection:	Up to C5

¹⁾ Operating temperature differs depending on chosen output wattage




STORK FLOOD

Power:	5 - 315 W
Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz
Lumen output:	Up to 48 200 lm
CCT:	2700 / 3000 / 4000 ¹²⁾
Installation:	Tool-less
Nature friendly:	PC Amber / Red / 1800 K
Neto weight:	Up to 14.3 kg



STORK LITTLE BROTHER FLOOD ¹³⁾

Power:	5 - 230 W
Voltage:	198 - 264 / 110 - 277 / 90 - 300 V, 50 - 60 Hz
Lumen output:	Up to 35 830 lm
CCT:	2700 / 3000 / 4000 ¹²⁾
Installation:	Tool-less
Nature friendly:	PC Amber / Red / 1800 K
Neto weight:	Up to 7 kg




STORK LITTLE SISTER FLOOD ¹³⁾

Power:	5 - 96 W
Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz
Lumen output:	Up to 13 630 lm
CCT:	2700 / 3000 / 4000 K ¹²⁾
Installation:	Tool-less
Nature friendly:	PC Amber / Red / 1800 K
Neto weight:	Up to 3.5 kg



MINI MARTIN GEN 2 FLOOD TOOL-LESS ¹⁴⁾

Power:	5 - 145 W
Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz
Lumen output:	Up to 19 755 lm
CCT:	2700 / 3000 / 4000 ¹⁸⁾
Installation:	Pre-wired cable 30 cm
Neto weight:	Up to 6.5 kg



MICRO MARTIN FLOOD ¹⁴⁾

Power:	5 - 115 W
Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz
Lumen output:	Up to 15 030 lm
CCT:	2700 / 3000 / 4000 K ¹⁸⁾
Installation:	Pre-wired cable 30 cm
Neto weight:	Up to 4.3 kg



COLIBRI FLOOD

Power:	5 - 50 W
Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz
Lumen output:	Up to 7 025 lm
CCT:	2700 / 3000 / 4000 K ¹²⁾
Installation:	Pre-wired cable 30 cm
Neto weight:	Up to 2.9 kg



COLIBRI MIDI FLOOD

Power:	5 - 87 W
Voltage:	220 - 240 / 110 - 277 V, 50 - 60 Hz
Lumen output:	Up to 13 100 lm
CCT:	2700 / 3000 / 4000 K ¹²⁾
Installation:	Pre-wired cable 30 cm
Neto weight:	Up to 4.6 kg

²⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

Note! Only fixtures with CCT of 3000 K or lower are DarkSky approved!

³⁾ Smooth luminaire versions available. Please visit our website for detailed information

⁴⁾ Smooth and tool-less luminaire versions available. Please visit our website for detailed information

⁵⁾ Depending on the configuration. Please contact VIZULO export representatives for additional information

⁶⁾ Coming soon

⁷⁾ Available only for Tool-less and Tool-less Smooth versions

⁸⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

Mustang



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body:	Die-cast aluminium	Lifetime:	Up to 100 000 h (L90B10) at Ta = 25 °C
Power:	50 - 700 W	Warranty:	5 years
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Installation:	On bracket / Wall / Ceiling
		Socket:	NEMA Top / Zhaga Top
Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz	Intelligent control:	Stand-alone / Group / CMS
Lumen output:	Up to 103 320 lm	Sensor:	Daylight
CRI:	>70 / >80 / >90 ¹⁾	Surge protection:	10 kV
CCT:	2700 / 3000 / 4000 K ¹⁾	Corrosion protection:	Up to C5
Temperature:	-40 to +50 °C	Neto weight:	Up to 41 kg

¹⁾ IK08 refers to version with glass cover, IK09 refers to version with housing
²⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT




MUSTANG




MUSTANG with floodlight console

Dimensions with standard console



Dimensions with floodlight console

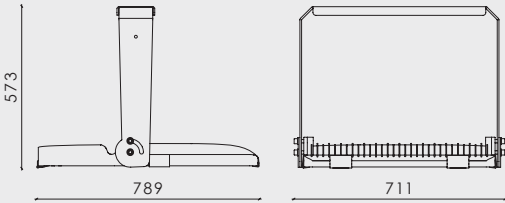

Mustang,
Riga International Airport,
Latvia



Owl



RAL7035 RAL9006 DB703 RAL9005


Other colors on request

Body:	Die-cast aluminium	Lifetime:	Up to 100 000 h (L90B10) at Ta = 25 °C
Power:	85 - 380 W	Warranty:	5 years
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Installation:	On bracket / Wall / Ceiling
		Socket:	NEMA Top / Zhaga Top
Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz	Intelligent Control:	Stand-alone / Group / CMS
Lumen output:	Up to 55 455 lm	Sensor:	Daylight
CRI:	>70 / >80 / >90 ¹⁾	Surge protection:	10 kV
CCT:	2700 / 3000 / 4000 ¹⁾	Corrosion protection:	Up to C5
Temperature:	-40 up to +50 °C ²⁾	Neto weight:	Up to 19 kg

¹⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT
²⁾ Operating temperature differs depending on chosen output wattage



OWL with standard console

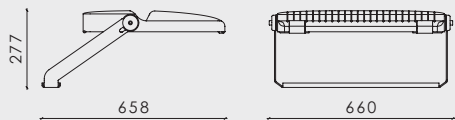

OWL with floodlight console



OWL high-bay



Owl,
Courchevel,
France



Eagle family





RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body:	Die-cast aluminium	Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C
Dimming:	DALI / 1-10 V / DMX / Midnight dimming / Step dimming / Mains dimming	Warranty:	5 years
Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz	Installation:	On bracket / Wall / Ceiling
CRI:	>70 / >80 / >90 ¹⁾	Socket:	NEMA Top / Zhaga Top
CCT:	2700 / 3000 / 4000 ¹⁾	Intelligent control:	Stand-alone / Group / CMS
TLCI:	>90 ²⁾	Sensor:	Daylight
Temperature:	-40 to +50 °C	Surge protection:	10 kV
		Corrosion protection:	Up to C5


¹⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT
²⁾ For CRI > 90 and CCT 5000, 5700 K

MOUNTING OPTIONS

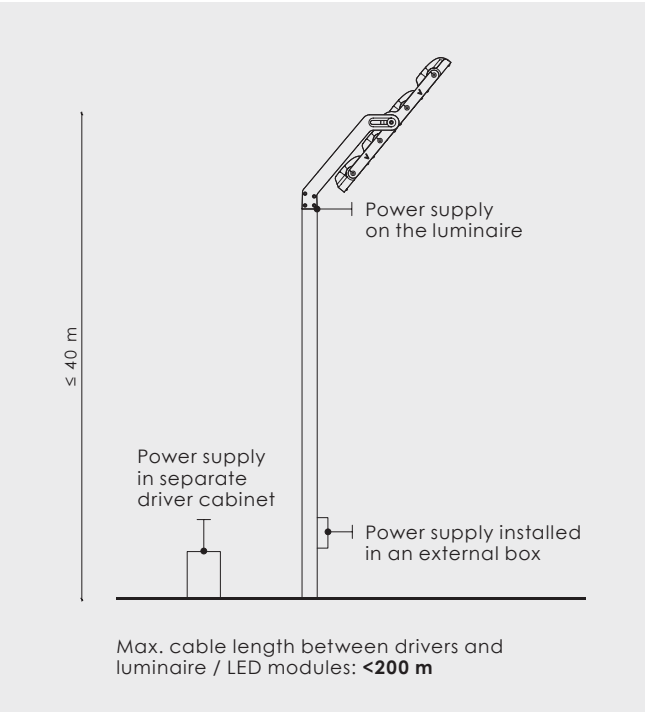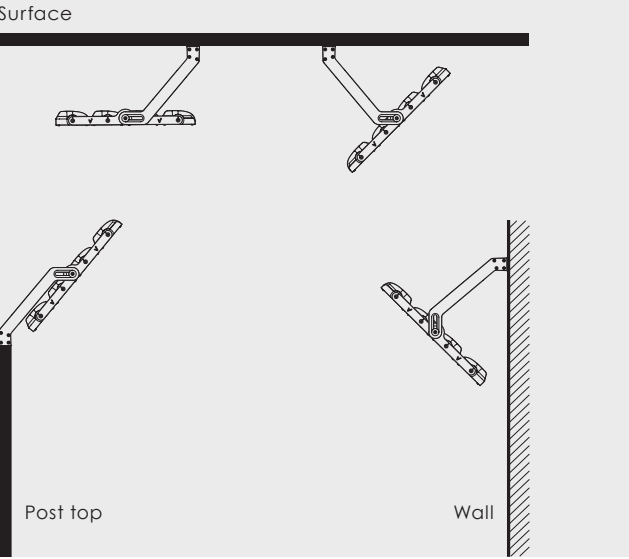


EAGLE 1 HEAD

Power:	255 - 600 W
Lumen output:	Up to 79 160 lm
Weight:	Up to 15.8 kg

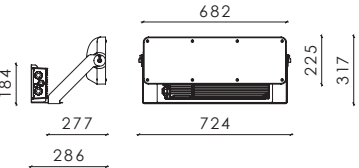


EAGLE 2 HEADS

Power:	510 - 1 200 W
Lumen output:	Up to 156 575 lm
Weight:	Up to 24.3 kg

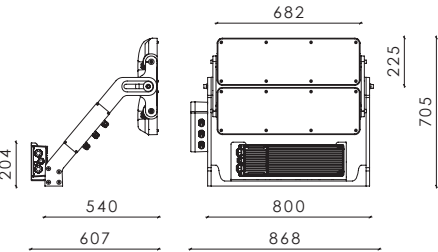


EAGLE 3 HEADS

Power:	765 - 1 800 W
Lumen output:	Up to 228 472 lm
Weight:	Up to 33.1 kg

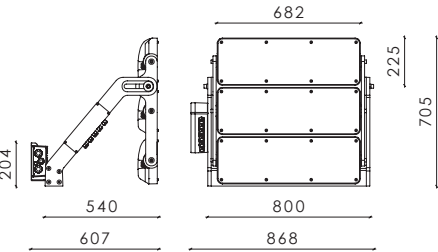

EAGLE 4 HEADS

Power:	1 020 - 2 400 W
Lumen output:	Up to 301 450 lm
Weight:	Up to 41.7 kg

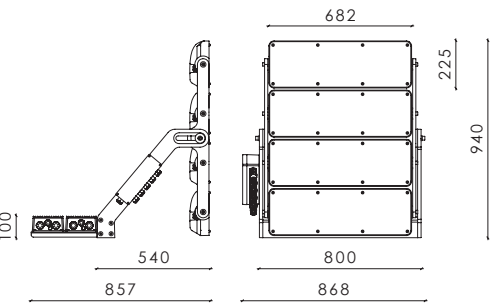

↙
Eagle,
Stade Mathieu Bodmer,
Evreux, France



VIZULO

Bukultu street 11
Riga, LV – 1005, Latvia

Sales: + 371 67 383 023
Production: + 371 67 383 024

sales@vizulo.com
www.vizulo.com



VIZULO



VIZULO



VIZULOSOLUTIONS