

EXTERIOR

TECHNICAL

content

04	Stork family
08	Martin family
10	Colibri family
11	Blackbird family
14	Luschnia family
16	Lapwing family
18	Blackbird family
22	Woodpecker
23	Heron
24	Lilly, Crocus
25	Orris Basic, Bell
26	Floodlighting
28	Mustang
29	Owl
30	Eagle family
32	Nightjar family

Stork family



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body:	Die-cast aluminium	Installation:	Tool-less
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Socket:	NEMA Top / Zhaga Top and Bottom
CRI:	>70 / >80 / >90 ¹⁾	Intelligent control:	Stand-alone / Group / CMS
CCT:	2700 / 3000 / 4000 K ¹⁾	Sensor:	Motion / Motion + Daylight / Daylight
Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C	Surge protection:	4 / 6 / 10 kV
Warranty:	5 years	Nature friendly:	PC Amber / Red / 1800 K
Temperature:	-40 up to +55 °C ²⁾	Corrosion protection:	Up to C5
		Neto weight:	Up to 13.8 kg


¹⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT
Note! Only fixtures with CCT of 3000 K or lower are DarkSky approved!
²⁾ Operating temperature differs depending on chosen output wattage

NEW

STORK NEPHEW



Voltage: 198 - 264 / 110 - 227 / 90 - 305 V, 50 - 60 Hz
Power: Up to 140 W
Lumen output: Up to 21 983 lm



STORK RANGE



with fins smooth



4 console versions available




STORK

Voltage: 198 - 264 / 110 - 277 V, 50 - 60 Hz
Power: 5 - 315 W
Lumen output: Up to 48 200 lm



STORK SMOOTH

Voltage: 198 - 264 / 110 - 277 V, 50 - 60 Hz
Power: 5 - 260 W
Lumen output: Up to 40 670 lm



³⁾ Coming soon



↳
Budapest,
Hungary

Stork family



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body:	Die-cast aluminium	Installation:	Tool-less
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Socket:	NEMA Top / Zhaga Top and Bottom
CRI:	>70 / >80 / >90 ¹⁾	Intelligent control:	Stand-alone / Group / CMS
CCT:	2700 / 3000 / 4000 K ¹⁾	Sensor:	Motion / Motion + Daylight / Daylight
Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C	Surge protection:	4 / 6 / 10 kV
Warranty:	5 years	Nature friendly:	PC Amber / Red / 1800 K
Temperature:	-40 up to +55 °C ²⁾	Corrosion protection:	Up to C5
		Neto weight:	Up to 13.8 kg

¹⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT
Note! Only fixtures with CCT of 3000 K or lower are DarkSky approved!


²⁾ Operating temperature differs depending on chosen output wattage

STORK LITTLE BROTHER RANGE




STORK LITTLE BROTHER

Voltage:	198 - 264 / 110 - 277 / 90 - 305 V, 50 - 60 Hz
Power:	5 - 200 W
Lumen output:	Up to 31 540 lm




STORK LITTLE BROTHER ROUGH

Voltage:	198 - 264 / 110 - 277 / 90 - 305 V, 50 - 60 Hz
Power:	161 - 230 W
Lumen output:	Up to 35 835 lm



STORK LITTLE BROTHER SMOOTH

Voltage:	198 - 264 / 110 - 277 / 90 - 305 V, 50 - 60 Hz
Power:	5 - 190 W
Lumen output:	Up to 30 205 lm




STORK LITTLE SISTER RANGE




STORK LITTLE SISTER

Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz
Power:	5 - 96 W
Lumen output:	Up to 13 630 lm



STORK LITTLE SISTER SMOOTH

Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz
Power:	5 - 90 W
Lumen output:	Up to 12 900 lm




STORK LITTLE SISTER EXTENDED RANGE



STORK LITTLE SISTER EXTENDED SMOOTH

Voltage:	198 - 264 V, 50 - 60 Hz
Power:	5 - 96 W
Lumen output:	Up to 14 990 lm



Martin family



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body:	Die-cast aluminium	Installation:	Pre-wired cable 30 cm
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Socket:	NEMA Top / Zhaga Top and Bottom
Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz	Intelligent control:	Stand-alone / Group / CMS
CRI:	>70 / >80 / >90	Sensor:	Motion / Motion + Daylight / Daylight
Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C	Surge protection:	4 / 6 / 10 kV
Warranty:	5 years	Nature friendly:	PC Amber / Red / 1800 K
Temperature:	-40 up to +50 °C ¹³	Corrosion protection:	Up to C5
		Neto weight:	Up to 6.5 kg


¹¹ Depending on the configuration. Please contact VIZULO export representatives for additional information
²¹ Available only for Tool-less and Tool-less Smooth versions
³¹ Operating temperature differs depending on chosen output wattage

MINI MARTIN GEN 2 RANGE



MINI MARTIN TOOL-LESS

Power:	5 - 145 W
Lumen output:	Up to 18 540 lm
CCT:	2700 / 3000 / 4000 ¹⁵




⁵¹ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT



MINI MARTIN TOOL-LESS SMOOTH

Power:	5 - 130 W
Lumen output:	Up to 17 480 lm
CCT:	2700 / 3000 / 4000 ¹⁵




MICRO MARTIN RANGE



MICRO MARTIN / MICRO MARTIN TOOL-LESS


Power:	5 - 115 W
Lumen output:	Up to 14 371 lm
CCT:	2700 / 3000 / 4000 K ¹⁵



⁵¹ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

MICRO MARTIN SMOOTH / MICRO MARTIN TOOL-LESS SMOOTH

Power:	5 - 95 W
Lumen output:	Up to 12 183 lm
CCT:	2700 / 3000 / 4000 K ¹⁵



Mini Martin,
Watkins St, Merewether,
Australia

Colibri family



RAL7035 RAL9006 DB703 RAL9005

Other colors on request



Body:	Die-cast aluminium	Installation:	Pre-wired cable 30 cm
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Spigot:	42 mm / 60 mm / 76 mm
Voltage:	220 - 240 / 110 - 277 V, 50 - 60 Hz	Socket:	NEMA Top / Zhaga Top and Bottom
CRI:	>70 / >80 / >90 ¹⁾	Intelligent control:	Stand-alone / Group / CMS
CCT:	2700 / 3000 / 4000 K ²⁾	Sensor:	Motion / Motion + Daylight / Daylight
Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C	Surge protection:	4 / 6 / 10 kV
Warranty:	5 years	Corrosion protection:	Up to C5
Temperature:	-40 up to +50 °C ³⁾	Neto weight:	Up to 4.2 kg

¹⁾ IK09 can be reached with clear glass
²⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT
Note! Only fixtures with CCT of 3000 K or lower are DarkSky approved!
³⁾ Operating temperature differs depending on chosen output wattage



COLIBRI

Power: 5 - 50 W
Lumen output: Up to 7 026 lm




Possible regulation angles



COLIBRI MIDI

Power: 5 - 87 W
Lumen output: Up to 13 100 lm



Blackbird family



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body:	Die-cast aluminium	Warranty:	5 years
Power:	5 - 100 W	Installation:	Pre-wired cable 30 cm
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Socket:	NEMA Top / Zhaga Top and Bottom
Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz	Intelligent control:	Stand-alone / Group / CMS
CRI:	>70 / >80 / >90 ¹⁾	Sensor:	Motion / Motion + Daylight / Daylight
CCT:	2700 / 3000 / 4000 ³⁾	Surge protection:	4 / 6 / 10 kV
Temperature:	-40 up to +50 °C ⁴⁾	Corrosion protection:	Up to C5
Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C	Neto weight:	Up to 8.5 kg

¹⁾ Except Blackbird Mushroom screw version, which has IP65
²⁾ Coming soon
³⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT
Note! Only fixtures with CCT of 3000 K or lower are DarkSky approved!
⁴⁾ Operating temperature differs depending on chosen output wattage



Blackbird Flood,
Deventer Hospital,
Netherlands



fixation with screws



tool-less installation



with HALO


Blackbird family

URBAN




BLACKBIRD SIDE ENTRY /
BLACKBIRD SIDE ENTRY TOOL-LESS

Lumen output: Up to 16 220 lm
Spigot: 40 - 60 mm / 60 - 76 mm




BLACKBIRD POST TOP /
BLACKBIRD POST TOP TOOL-LESS

Lumen output: Up to 16 220 lm
Spigot: 40 - 60 mm / 60 - 76 mm




BLACKBIRD HANGING /
BLACKBIRD HANGING TOOL-LESS

Lumen output: Up to 16 220 lm
Mounting: On wire ø 5 - 12 mm




BLACKBIRD TOP ENTRY /
BLACKBIRD TOP ENTRY TOOL-LESS

Lumen output: Up to 16 220 lm
Mounting: On console with M32 | G1/2 | G3/4 thread




BLACKBIRD SCEPTER /
BLACKBIRD SCEPTER TOOL-LESS

Lumen output: Up to 16 220 lm
Spigot: On scepter M20




BLACKBIRD MUSHROOM /
BLACKBIRD MUSHROOM TOOL-LESS

Lumen output: Up to 14 700 lm
Spigot: 40 - 60 mm / 60 - 76 mm



BLACKBIRD FLOOD /
BLACKBIRD FLOOD TOOL-LESS

Lumen output: Up to 16 220 lm
Spigot: On bracket / wall / ceiling



Blackbird Side Entry Halo,
Frantorp, Gothenburg,
Sweden

Luscinia family



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body:	Die-cast aluminium	Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C
Power:	5 - 80 W	Warranty:	5 years
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Installation:	Pre-wired cable 30 cm
Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz	Socket:	NEMA Top / Zhaga Top and Bottom
Lumen output:	Up to 12 890 lm	Intelligent control:	Stand-alone / Group / CMS
CRI:	>70 / >80 / >90 ¹⁾	Sensor:	Motion / Motion + Daylight / Daylight
CCT:	2700 / 3000 / 4000 K ²⁾	Surge protection:	4 / 6 / 10 kV
Temperature:	-40 up to +55 °C ³⁾	Corrosion protection:	Up to C5

¹⁾ Coming soon

²⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

³⁾ Operating temperature differs depending on chosen output wattage



Luscinia Post Top





Luscinia Post Top
with LED cover plate




Luscinia Post Top
with opal glass

LUSCINIA POST TOP

Spigot:	40 - 60 mm / 60 - 76 mm
Neto weight:	Up to 6.5 kg




Dimensions with
Luscinia Cap accessory




LUSCINIA TOP ENTRY

Mounting:	On console with 1/2" thread
Neto weight:	Up to 6 kg



LUSCINIA SIDE ENTRY

Spigot:	40 - 60 mm / 60 - 76 mm
Neto weight:	Up to 6.5 kg



LUSCINIA HANGING

Mounting:	On wire ø 5 - 12 mm
Neto weight:	Up to 5.6 kg



Luscinia Post Top,
Marks gymnasieskola,
Kinna, Sweden

Lapwing family



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body: Die-cast aluminium
Power: 5 - 150 W
Dimming: DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming
Voltage: 198 - 264 / 110 - 277 V, 50 - 60 Hz
Lumen output: Up to 24 057 lm
CRI: >70 / >80 / >90 ¹²
CCT: 2700 / 3000 / 4000 ¹²
Temperature: -40 up to +55 °C ¹³

Lifetime: Up to 100 000 h (L98B10) at Ta = 25 °C
Warranty: 5 years
Installation: Tool-less / Pre-wired cable 30 cm
Socket: NEMA Top / Zhaga Top and Bottom
Intelligent control: Stand-alone / Group / CMS
Sensor: Motion / Motion + Daylight / Daylight
Surge protection: 4 / 6 / 10 kV
Nature friendly: PC Amber / Red / 1800 K
Corrosion protection: Up to C5

¹¹ Coming soon


¹² 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

¹³ Operating temperature differs depending on chosen output wattage





LAPWING Y-TYPE | TOOL-LESS

Spigot: 40 - 60 mm / 60 - 76 mm
Neto weight: Up to 18 kg




LAPWING J-TYPE | TOOL-LESS

Spigot: 40 - 60 mm / 60 - 76 mm
Neto weight: Up to 16.5 kg




LAPWING TOP ENTRY | TOOL-LESS

Mounting: On console with G1/2 or G3/4 thread
Neto weight: Up to 9.9 kg




LAPWING SIDE ENTRY | TOOL-LESS

Spigot: 40 - 60 mm / 60 - 76 mm
Neto weight: Up to 10.4 kg



LAPWING HANGING | TOOL-LESS

Mounting: On wire ø 5 - 12 mm
Neto weight: Up to 8.9 kg



LAPWING MUSHROOM | TOOL-LESS

Spigot: 40 - 60 mm / 60 - 76 mm
Neto weight: Up to 10.6 kg



COMING SOON

Blackbird family



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body:	Die-cast aluminium	Installation:	Pre-wired cable 30 cm
Voltage:	198 - 264 V, 50 - 60 Hz	Intelligent control:	Stand-alone / Group / CMS
CRI:	>70 / >80 / >90 ¹²	Sensor:	Motion / Motion + Daylight / Daylight
CCT:	2700 / 3000 / 4000 K ¹²	Surge protection:	4 / 6 / 10 kV
Temperature:	-40 to +50 °C	Nature friendly:	PC Amber / Red / 1800 K
Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C	Corrosion protection:	Up to C5
Warranty:	5 years		

¹¹ Coming soon
¹² 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

BLACKBIRD MINI | ø 200 mm

Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming
Power:	5 - 30 W
Lumen output:	Up to 3 740 lm
Socket:	Zhaga Top and Bottom



BLACKBIRD MINI TOP ENTRY

BLACKBIRD MICRO | ø 120 mm

Dimming:	DALI / Non dimmable
Power:	5 - 12 W
Lumen output:	Up to 1 630 lm



BLACKBIRD MINI HANGING
/ WITH ZHAGA /

Spots



BLACKBIRD MICRO
SPOT BRACKET MOUNT

BLACKBIRD MICRO
SPOT BRACKET MOUNT

BLACKBIRD MICRO
SPOT FLANGE MOUNT

BLACKBIRD MICRO
SPOT FLANGE MOUNT

Blackbird family



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body: Die-cast aluminium
Voltage: 198 - 264 V, 50 - 60 Hz
CRI: >70 / >80 / >90¹²
CCT: 2700 / 3000 / 4000 K¹²
Temperature: -40 to +50 °C
Lifetime: Up to 100 000 h (L98B10) at Ta = 25 °C
Warranty: 5 years

Installation: Pre-wired cable 30 cm
Intelligent control: Stand-alone / Group / CMS
Sensor: Motion / Motion + Daylight / Daylight
Surge protection: 4 / 6 / 10 kV
Nature friendly: PC Amber / Red / 1800 K
Corrosion protection: Up to C5

¹⁾ Coming soon

²⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

BLACKBIRD MINI | ø 200 mm

Dimming: DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming
Power: 5 - 30 W
Lumen output: Up to 3 740 lm
Socket: Zhaga Top and Bottom

BLACKBIRD MICRO | ø 120 mm

Dimming: DALI / Non dimmable
Power: 5 - 12 W
Lumen output: Up to 1 630 lm

Facade



BLACKBIRD MINI / MICRO HALF SPHERE FACADE



BLACKBIRD MINI / MICRO FACADE CONSOLE
 / WITH HALO /

Bollards



BLACKBIRD MINI / MICRO
 BOLLARD HOOD



/ 1200 mm /

/ 700 mm /


Woodpecker



RAL9005

Body:	Extruded aluminium	Warranty:	5 years
Power:	15 - 28 W Small 20 - 52 W Large	Installation:	On flange
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Socket:	NEMA Top / Zhaga Top and Bottom
Voltage:	220 - 240 V, 50 - 60 Hz	Intelligent control:	Stand-alone / Group / CMS
Lumen output:	Up to 7 500 lm	Sensor:	Motion / Motion + Daylight / Daylight
CRI:	>70 / >80 / >90 ¹⁾	Surge protection:	4 / 6 / 10 kV
CCT:	2700 / 3000 / 4000 ¹⁾	Nature friendly:	PC Amber / Red / 1800 K
Temperature:	-40 to +50 °C	Corrosion protection:	Up to CX
Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C	Neto weight:	Up to 0.9 kg Small Up to 1.6 kg Large

¹⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

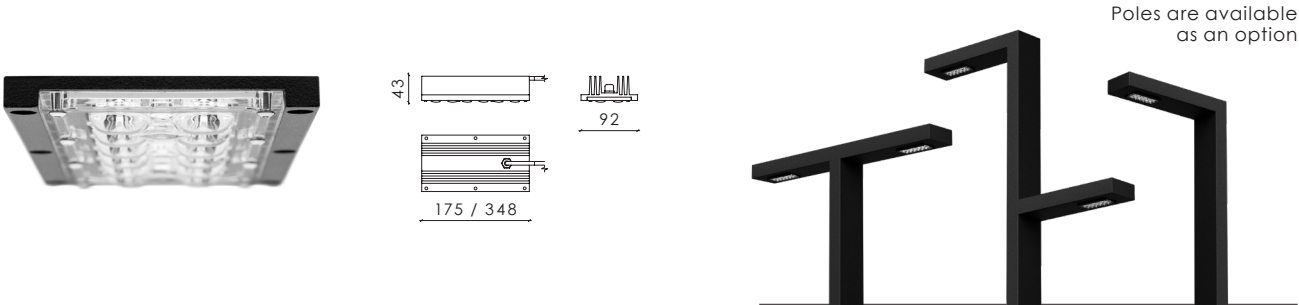

Robin & Rook




RAL9005

Body:	Die-cast aluminium	Warranty:	5 years
Voltage:	220 - 240 V, 50 - 60 Hz	Installation:	On wall
CRI:	>70 / >80 / >90 ¹⁾	Surge protection:	4 / 6 / 10 kV
CCT:	2700 / 3000 / 4000 ¹⁾	Nature friendly:	PC Amber / Red / 1800 K
Temperature:	-40 to +40 °C	Corrosion protection:	Up to C5
Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C	Neto weight:	Up to 3.3 kg

¹⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

ROBIN **IP66** **IK10**

Power:	8 - 26 W
Dimming	DALI / Midnight dimming / Non dimmable
Lumen output:	Up to 3 350 lm

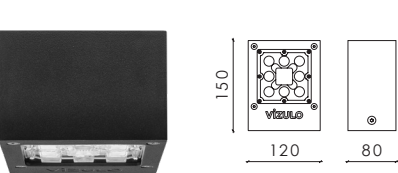

ROOK **IP65** **IK08**

Power:	15 - 28 W
Dimming	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming
Lumen output:	Up to 3 890 lm



Heron



RAL9006 DB703 RAL9005 GALVANIZED

Other colors on request

Body:	Extruded Aluminium / Steel	Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C
Power:	8 - 26 W	Warranty:	5 years
Dimming:	DALI / Midnight dimming	Installation:	IP connector
Voltage:	220 - 240 V, 50 - 60 Hz	Mounting:	On flange
Lumen output:	Up to 3 350 lm	Surge protection:	1 / 2 / 4 / 10 kV
CRI:	>70 / >80 / >90 ¹⁾	Nature friendly:	PC Amber / Red / 1800 K
CCT:	2700 / 3000 / 4000 ¹⁾	Corrosion protection:	Up to C5
Temperature:	-40 to +40 °C	Neto weight:	Up to 15 kg

¹⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT



↙
Heron,
Wagga Wagga,
Australia

Lilly & Crocus



RAL9005

Body: Die-cast aluminium
Power: 5 - 100 W
Dimming: DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming
Voltage: 220 - 240 V, 50 - 60 Hz
CRI: >70 / >80 / >90 ¹⁾
CCT: 2700 / 3000 / 4000 ¹⁾
Temperature: -40 to +40 °C

Lifetime: Up to 100 000 h (L98B10) at Ta = 25 °C
Warranty: 5 years
Intelligent control: Stand-alone / Group / CMS
Sensor: Daylight
Surge protection: 4 / 6 / 10 kV
Nature friendly: PC Amber / Red / 1800 K
Corrosion protection: Up to CX

¹⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

LILLY IP66

Lumen output: Up to 12 475 lm
Socket: NEMA Top / Zhaga Top
Spigot: 60 - 75 mm / 76 - 80 mm
Neto weight: Up to 10.1 kg



CROCUS IP54

Lumen output: Up to 12 235 lm
Socket: Zhaga Bottom
Spigot: 40 - 76 mm
Neto weight: Up to 8.9 kg



↙
Lilly,
Akureyri, Iceland



↙
Crocus,
Akureyri, Iceland

Orris Basic & Bell



RAL9005

Body: Die-cast aluminium
Dimming: DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming
Voltage: 220 - 240 V, 50 - 60 Hz
CRI: >70 / >80 / >90 ¹⁾
CCT: 2700 / 3000 / 4000 ¹⁾
Lifetime: Up to 100 000 h (L98B10) at Ta = 25 °C


Warranty: 5 years
Intelligent control: Stand-alone / Group / CMS
Sensor: Daylight
Surge protection: 4 / 6 / 10 kV
Nature friendly: PC Amber / Red / 1800 K
Corrosion protection: Up to CX

¹⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

ORRIS BASIC IP65 IK08

Power: 5 - 75 W
Lumen output: Up to 8 920 lm
Temperature: -40 up to +50 ²⁾
Socket: NEMA Top / Zhaga Top
Spigot: 40 - 60 mm
Neto weight: Up to 5.6 kg


²⁾ Operating temperature differs depending on chosen output wattage
³⁾ ENEC update for IP66 coming soon
⁴⁾ IK08 refers to version with flat glass

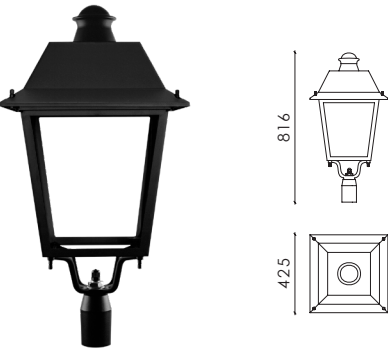

↙
Orris Basic,
Savion, Israel

BELL IP54 / IP66 IK08 / IK10

Power: 5 - 82 W
Lumen output: Up to 12 125 lm
Temperature: -40 to +40 °C
Socket: Zhaga Top
Mounting: On console with ø 28 mm bracket
Neto weight: Up to 7.6 kg

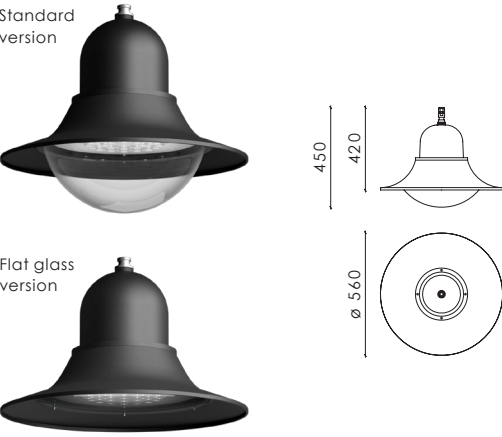

↙
Bell,
Riga, Latvia

Floodlighting



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body: Die-cast aluminium
Dimming: DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming
CRI: >70 / >80 / >90
Temperature: -40 up to +50 °C ¹⁾
Lifetime: Up to 100 000 h (L98B10) at Ta = 25 °C
Warranty: 5 years


Mounting: On bracket / Wall / Ceiling
Socket: NEMA Top / Zhaga Top and Bottom
Intelligent control: Stand-alone / Group / CMS
Sensor: Motion / Motion + Daylight / Daylight
Surge protection: 4 / 6 / 10 kV
Corrosion protection: Up to C5

¹⁾ Operating temperature differs depending on chosen output wattage




STORK FLOOD

Power: 5 - 315 W
Voltage: 198 - 264 / 110 - 277 V, 50 - 60 Hz
Lumen output: Up to 48 200 lm
CCT: 2700 / 3000 / 4000 ¹²⁾
Installation: Tool-less
Nature friendly: PC Amber / Red / 1800 K
Neto weight: Up to 14.3 kg





STORK LITTLE BROTHER FLOOD ¹³⁾

Power: 5 - 200 W
Voltage: 198 - 264 / 110 - 277 / 90 - 305 V, 50 - 60 Hz
Lumen output: Up to 31 540 lm
CCT: 2700 / 3000 / 4000 ¹²⁾
Installation: Tool-less
Nature friendly: PC Amber / Red / 1800 K
Neto weight: Up to 7 kg




STORK LITTLE SISTER FLOOD ¹³⁾

Power: 5 - 96 W
Voltage: 198 - 264 / 110 - 277 V, 50 - 60 Hz
Lumen output: Up to 13 630 lm
CCT: 2700 / 3000 / 4000 K ¹²⁾
Installation: Tool-less
Nature friendly: PC Amber / Red / 1800 K
Neto weight: Up to 3.5 kg

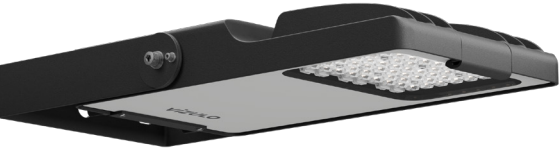


MINI MARTIN GEN 2 FLOOD TOOL-LESS ¹⁴⁾

Power: 5 - 145 W
Voltage: 198 - 264 / 110 - 277 V, 50 - 60 Hz
Lumen output: Up to 18 540 lm
CCT: 2700 / 3000 / 4000 ¹⁸⁾
Installation: Pre-wired cable 30 cm
Neto weight: Up to 6.5 kg



MICRO MARTIN FLOOD ¹⁴⁾

Power: 5 - 115 W
Voltage: 198 - 264 / 110 - 277 V, 50 - 60 Hz
Lumen output: Up to 14 371 lm
CCT: 2700 / 3000 / 4000 K ¹⁸⁾
Installation: Pre-wired cable 30 cm
Neto weight: Up to 4.3 kg



COLIBRI FLOOD

Power: 5 - 50 W
Voltage: 198 - 264 / 110 - 277 V, 50 - 60 Hz
Lumen output: Up to 7 026 lm
CCT: 2700 / 3000 / 4000 K ¹²⁾
Installation: Pre-wired cable 30 cm
Neto weight: Up to 2.9 kg



COLIBRI MIDI FLOOD

Power: 5 - 87 W
Voltage: 220 - 240 / 110 - 277 V, 50 - 60 Hz
Lumen output: Up to 13 100 lm
CCT: 2700 / 3000 / 4000 K ¹²⁾
Installation: Pre-wired cable 30 cm
Neto weight: Up to 4.6 kg

²⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

Note! Only fixtures with CCT of 3000 K or lower are DarkSky approved!

³⁾ Smooth luminaire versions available. Please visit our website for detailed information

⁴⁾ Smooth and tool-less luminaire versions available. Please visit our website for detailed information

⁵⁾ Depending on the configuration. Please contact VIZULO export representatives for additional information

⁶⁾ Coming soon

⁷⁾ Available only for Tool-less and Tool-less Smooth versions

⁸⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT

Mustang



RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body: Die-cast aluminium
Power: 50 - 700 W
Dimming: DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming
Voltage: 198 - 264 / 110 - 277 V, 50 - 60 Hz
Lumen output: Up to 103 320 lm
CRI: >70 / >80 / >90 ¹⁾
CCT: 2700 / 3000 / 4000 K ¹⁾
Temperature: -40 to +50 °C

Lifetime: Up to 100 000 h (L90B10) at Ta = 25 °C
Warranty: 5 years
Installation: On bracket / Wall / Ceiling
Socket: NEMA Top / Zhaga Top
Intelligent control: Stand-alone / Group / CMS
Sensor: Daylight
Surge protection: 10 kV
Corrosion protection: Up to C5
Neto weight: Up to 41 kg

¹⁾ IK08 refers to version with glass cover, IK09 refers to version with housing
²⁾ Coming soon
³⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT




MUSTANG




MUSTANG with floodlight console

Dimensions with standard console



Dimensions with floodlight console

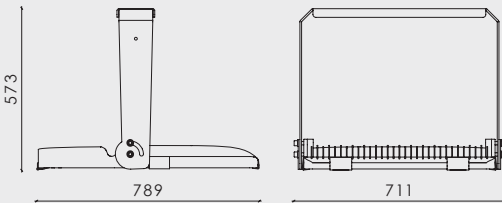

Mustang,
Riga International Airport,
Latvia

Owl



RAL7035 RAL9006 DB703 RAL9005

Other colors on request


Body: Die-cast aluminium
Power: 85 - 380 W
Dimming: DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming
Voltage: 198 - 264 / 110 - 277 V, 50 - 60 Hz
Lumen output: Up to 55 455 lm
CRI: >70 / >80 / >90 ¹⁾
CCT: 2700 / 3000 / 4000 K ¹⁾
Temperature: -40 up to +50 °C ³⁾

Lifetime: Up to 100 000 h (L90B10) at Ta = 25 °C
Warranty: 5 years
Installation: On bracket / Wall / Ceiling
Socket: NEMA Top / Zhaga Top
Intelligent Control: Stand-alone / Group / CMS
Sensor: Daylight
Surge protection: 10 kV
Corrosion protection: Up to C5
Neto weight: Up to 19 kg

¹⁾ Coming soon
²⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT
³⁾ Operating temperature differs depending on chosen output wattage



OWL with standard console



OWL with floodlight console



OWL high-bay



Owl,
Courchevel,
France

Eagle family





RAL7035 RAL9006 DB703 RAL9005

Other colors on request

Body:	Die-cast aluminium	Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C
Dimming:	DALI / 1-10 V / DMX / Midnight dimming / Step dimming / Mains dimming	Warranty:	5 years
Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz	Installation:	On bracket / Wall / Ceiling
CRI:	>70 / >80 / >90 ¹⁾	Socket:	NEMA Top / Zhaga Top
CCT:	2700 / 3000 / 4000 ¹⁾	Intelligent control:	Stand-alone / Group / CMS
TLCI:	>90 ²⁾	Sensor:	Daylight
Temperature:	-40 to +50 °C	Surge protection:	10 kV
		Corrosion protection:	Up to C5


¹⁾ 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT
²⁾ For CRI > 90 and CCT 5000, 5700 K

MOUNTING OPTIONS

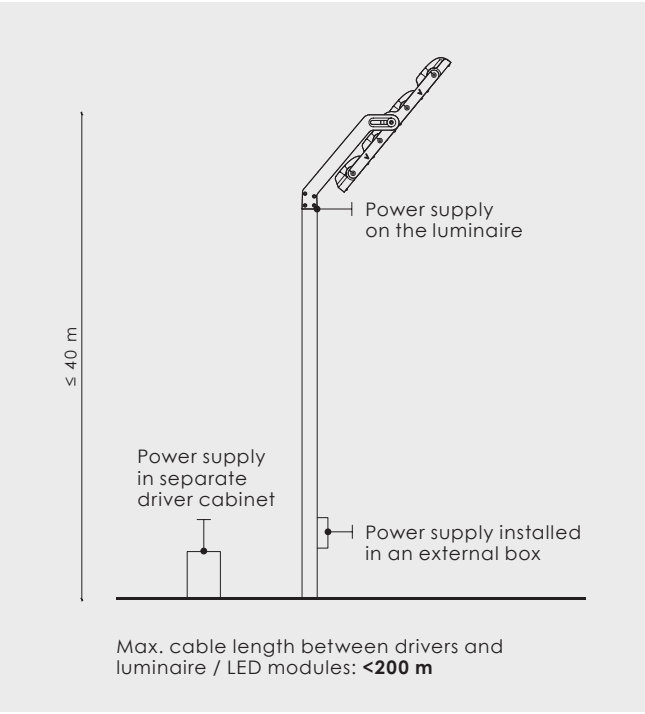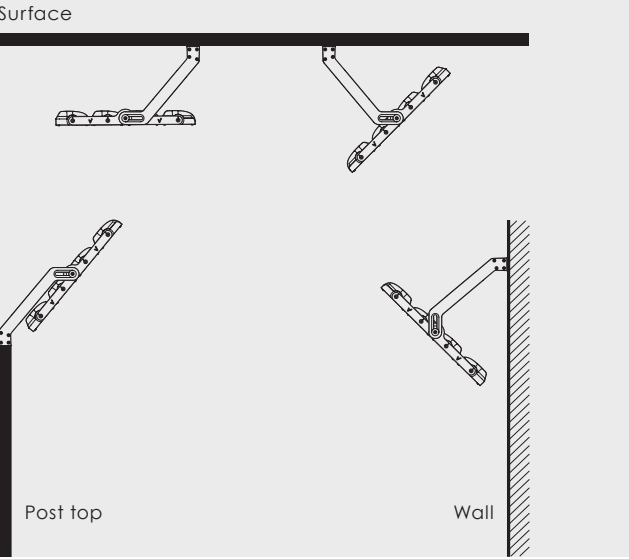


EAGLE 1 HEAD

Power:	255 - 600 W
Lumen output:	Up to 79 160 lm
Weight:	Up to 15.8 kg

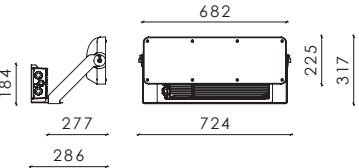


EAGLE 2 HEADS

Power:	510 - 1 200 W
Lumen output:	Up to 156 575 lm
Weight:	Up to 24.3 kg

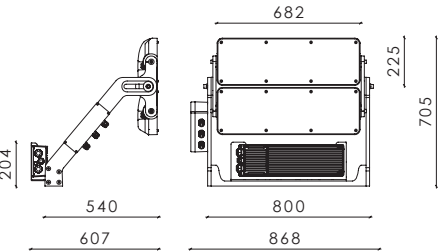


EAGLE 3 HEADS

Power:	765 - 1 800 W
Lumen output:	Up to 228 472 lm
Weight:	Up to 33.1 kg

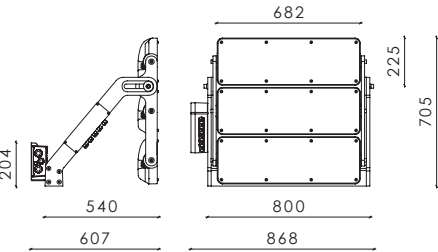

EAGLE 4 HEADS

Power:	1 020 - 2 400 W
Lumen output:	Up to 301 450 lm
Weight:	Up to 41.7 kg

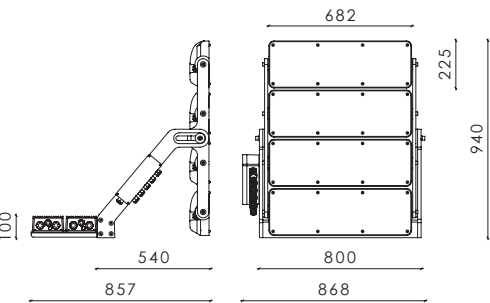

↙
Eagle,
Stade Mathieu Bodmer,
Evreux, France




Nightjar family



STAINLESS STEEL


Body:	AISI 316L	Installation:	Tool-less with safety screw
Dimming:	DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming	Mounting:	Oogland 300 / 400 / 500 / 600 mm Wall ¹ / Ceiling ¹ / On rod
Voltage:	198 - 264 / 110 - 277 V, 50 - 60 Hz	Intelligent control:	Tunnel CMS
CRI:	>70 / >80 / >90 ²	Surge protection:	4 / 6 / 10 kV
CCT:	2700 / 3000 / 4000 ²	Corrosion protection:	CX
Temperature:	-40 up to +50 °C ³	Power factor:	≥ 0.97 at full load
Lifetime:	Up to 100 000 h (L98B10) at Ta = 25 °C	Neto weight:	Up to 33.5 kg
Warranty:	5 years		

¹) Coming soon
²) 1800 / 2200 / 3500 / 5000 / 5700 / 6500 K available on request along with other not listed CRI and CCT
³) Operating temperature differs depending on chosen output wattage
⁴) Brackets with fixed or adjustable angle for wall and ceiling mounting

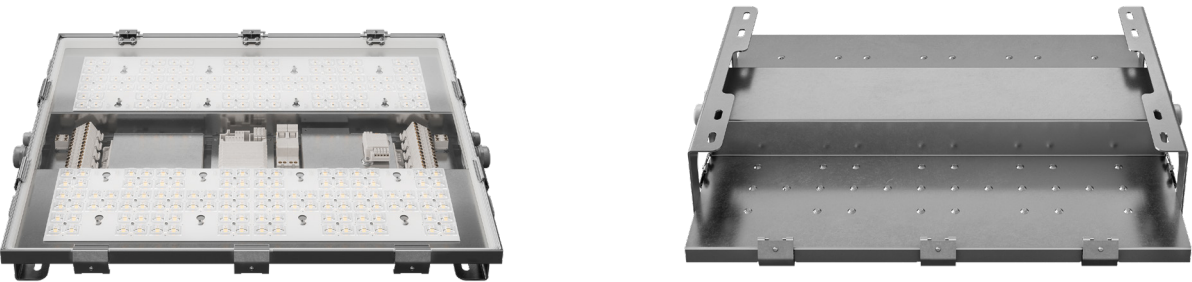


NIGHTJAR SMALL

Power: 5 - 180 W
Lumen output: Up to 26 508 lm

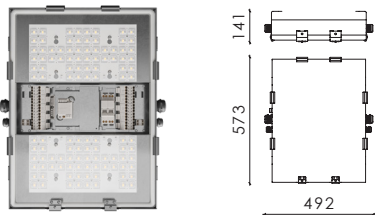


NIGHTJAR MEDIUM

Power: 5 - 360 W
Lumen output: Up to 47 969 lm

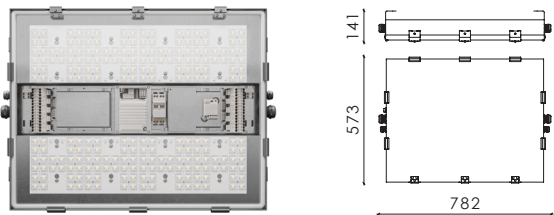

NIGHTJAR LARGE

Power: 5 - 540 W
Lumen output: Up to 79 041 lm

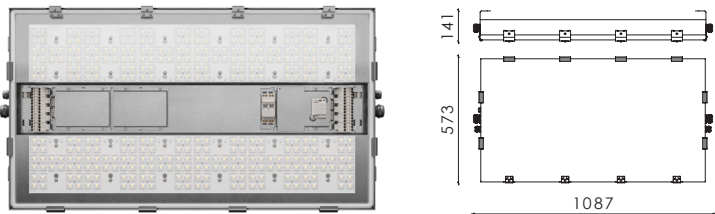

References



↘
Luscinia Post Top,
Lagerlundparken,
Norrköping, Sweden



↘
Blackbird
Side-entry, Tool-less,
Viesturdarzs, Riga,
Latvia

vizulo

Bukultu street 11
Riga, LV – 1005, Latvia

Sales: + 371 67 383 023
Production: + 371 67 383 024

sales@vizulo.com
www.vizulo.com



