

vizulo LAPWING

Inspired by the elegance and grace of the Lapwing bird, the VIZULO family's member LAPWING luminaire combines functionality with a clean, minimalist design.

n real life, Lapwing birds can be recognized by heir long crest and very broad and round wings. hese signature features are the inspiration behind the luminaire's large, round shape and he extraordinary Y and J consoles. LAPWING's design captures attention through its simplicity, ree from unnecessary embellishment, yet ensuring that this luminaire will make look back.


The different versions demonstrate a harmonious blend of form and function. Like the Lapwing's distinctive flight, these luminaires will bring address and captivating presence to differen burban landscapes.

LAPWING's tool-less version sets new benchmarks in safety, and ease of installation and maintenance. With versatile mounting options and innovative features, the LAPWING family is designed to enhance and illuminate diverse environments with both beauty and efficiency.







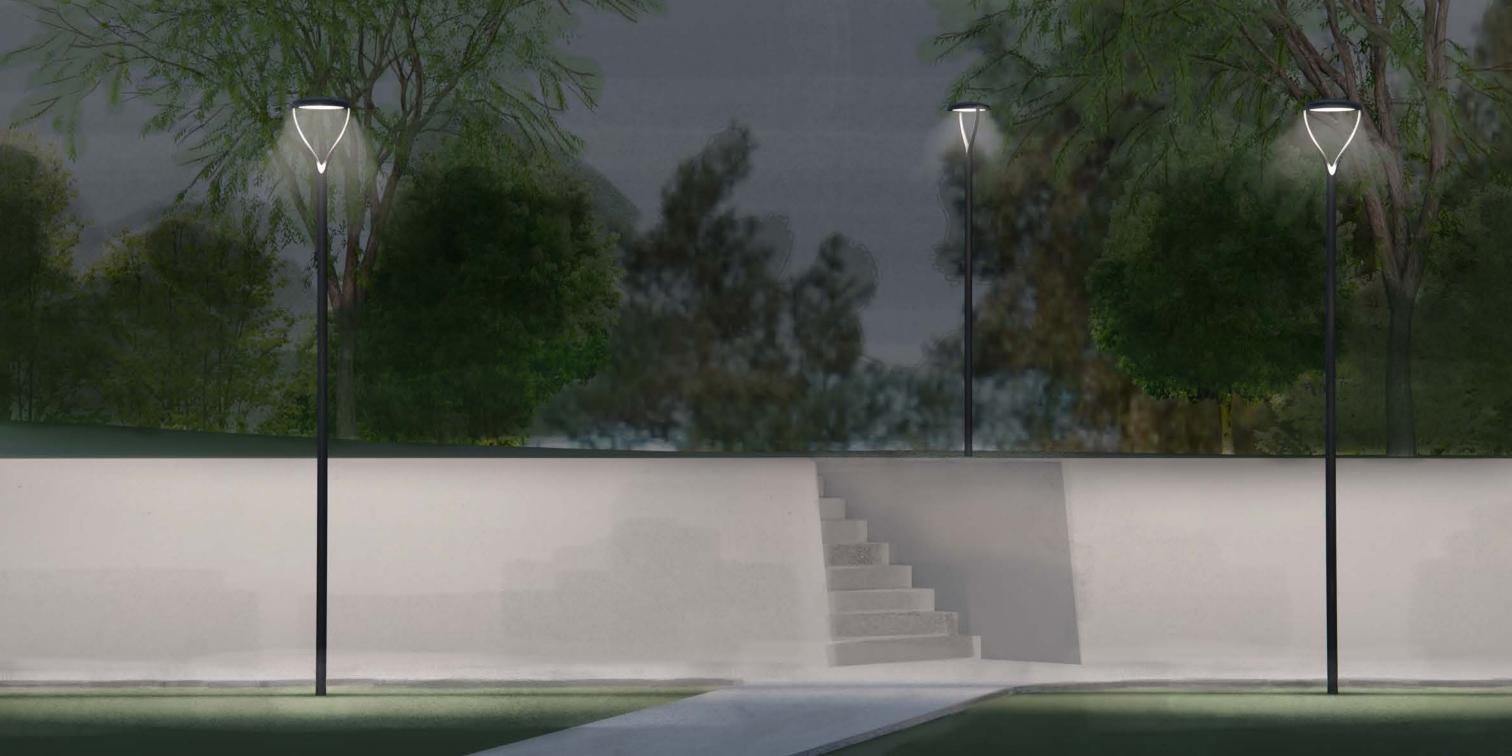
















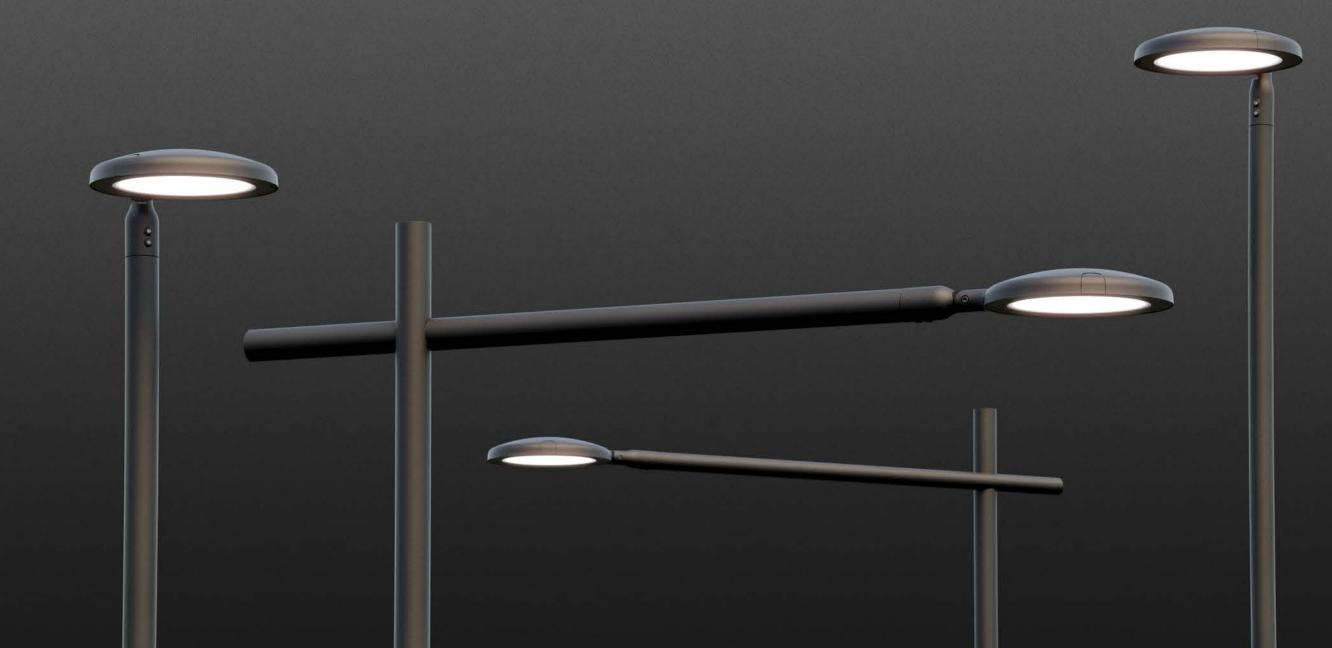







vizulo LAPWING Top-Entry Console







VIZULO LAPWING

Wire-Mount





vizulo Optics, Lens variety, Correlated color temperature



Multifocal eye lenses are common in the animal kingdom, from amphibians to mammals, including primates: different habitats demand different optical structures. VIZULO always takes an example from natures perfection; as a result, offering endless diversity with more than 100 optics to choose from, providing the best solutions for most simple to most complicated habitats.



vizulo Controls & connectivity



vizuLo Technical information

V 198 - 264 / 110 - 277

 Hz
 50 - 60

 W
 5 - 150

 Im
 Up to 24057

 Im/W
 Up to 186

K 2200 / 2700 / 3000 / 4000 / TW 2700 - 6500

°C -40 up to +55 CRI >70 / >80 / >90

Body: Die-cast aluminium

Dimming: DALI / 1-10 V / Midnight dimming / Step dimming / Mains dimming

Initial chromaticity: MacAdam 5

Lifetime: Up to L98B10 (100 000h) at Ta = 25 °C

Warranty: 5 years

nstallation: Tool-less / Pre-wired cable 30 cm
Mounting: 32 - 40 mm (6 / 40 - 60 mm / 76 mm
NEMA Top / Zhaga Top and Bottom

Intelligent Control: Stand-alone / Group / CMS

Sensor: Motion / Motion + Daylight / Daylight


Surge protection: 4/6/10 kV

Nature friendly: PC Amber / Red / 1800 K

Corrosion protection: Up to C5



^{*} Coming sooi

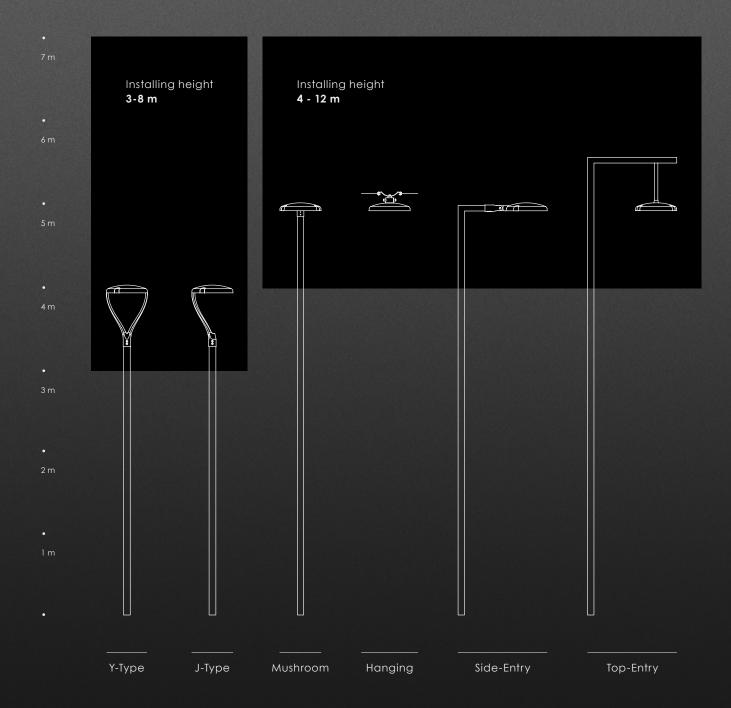

www.vizulo.com

